



EQUIPCO[®]

INNOVATIONS IN FUEL HANDLING

DRUM HANDLING

Catalogue
2017-2018



**www.equipco.com.au
1800 813 182**

DRUM HANDLING

DQM200

The DQM200 is designed for easy handling of 200lt steel drums. Spring tensioned floating axle with sliding drum hook. Heavy duty design. Heavy duty rubber coated cast iron wheels.

Code	Description
DQM200	Drum trolley with floating axle.
DQM200-P	Drum trolley with pneumatic wheels



D4

205 litre drum dolley. Powdercoated. For 205lt steel drums.

Code	Description
D4	205 litre drum dolley



272016

Safety non sparking multi head brass alloy drum wrench.

Code	Description
272016	Non sparking brass alloy drum bung wrench with multiple pattern off set handle for ease of operator use.



MDDH

Manual drum de-header

Code	Description
MDDH	Manual drum de-header with non sparking safety cutting blade.



DRUM CRADLES

HDC200



Code	Description
HDC200	Heavy duty drum cradle fitted with retractable handles. Zinc plated finish. 300 KG capacity. Tips and drains 200lt steel and some 200lt plastic drums.

SL-12

Static bonding wire assemblies. Options available with various fixing lugs and cable lengths to suit most applications. From bulk loading to small decanting operations.




Code	Description
SL-12	1 metre static bonding lead and twin alligator clips to help with earthing process when decanting flammables.
SL-22	2 metre static bonding lead.

AVD20

3/4" Atmospheric Vent to suit 19mm bung in drum. Vents drum at all times with flash arresting screen.



Code	Description
AVD20	3/4" atmospheric vent to suit 19mm bung in drums. Vents drum at all times with flash arresting screen.

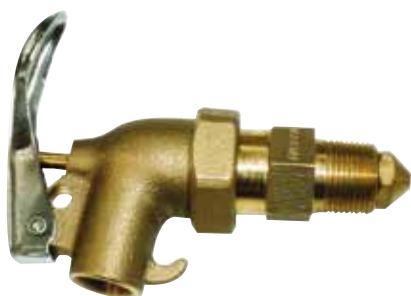

109DT

The 19mm ($\frac{3}{4}$ ") Brass construction self closing drum tap is designed for the safe dispensing of thin type liquids from drums. The sturdy constructed valve has a strong internal spring with Teflon seal for positive sealing action. A flash arresting screen is incorporated at valve inlet to help prevent exterior sources of ignition into drum while valve is open. A swivel spout is standard for ease of use to rotate discharge point. Lockable point in closed position. $\frac{3}{4}$ " BSP thread to suit small bung drums.

Code	Description
109DT	$\frac{3}{4}$ " BSPM brass swivel action self closing drum tap, teflon seal.

DV50

2" Safety Vent to suit 50mm bung in drum. Features automatic pressure relief valve and manual vacuum relief for decanting purposes. Inbuilt flash arresting screen.



Code	Description
DV50	2" BSP safety vent. Suits 50mm bung in drums. Brass construction with flash arrestor.

101FF

The 50mm (2") heavy duty brass construction sliding gate valve is designed for dispensing heavy type non corrosive viscous liquids. The Teflon sealing blade gives positive closing action with strong handle spring for unique self closing feature. Wire safety guard in outlet helps prevent possible pinch point. Teflon blade is replaceable.



Code	Description
101FF	2" Brass spring operated sliding gate tap designed for dispensing heavy type non corrosive viscous liquids with teflon seal.

54GV

2" BSP drum valve cast iron construction with brass sliding action seal plate. 2" BSP Heavy duty. Lockable.

Suitable for non flammable high viscosity products only



Code	Description
54GV	2" BSP cast iron sliding action drum valve. Heavy duty lockable to suit non flammable viscous products only

DF201

2" Poly drum tap. For detergents and oils.



Code	Description
DF201	2" Poly drum tap. For detergents and oils.

19GV

$\frac{3}{4}$ " drum valve. Cast iron construction with brass sliding action seal plate. 19mm BSP. Heavy duty. Lockable.

Suitable for non flammable high viscosity products only



Code	Description
19GV	$\frac{3}{4}$ " BSP Cast iron sliding action drum valve. Heavy duty, lockable. To suit non-flammable viscous products.

64GV

Cast iron sliding action drum valve 2" BSP. Suitable for non flammable high viscosity products only



Code	Description
64GV	2" BSP cast iron sliding action valve for non flammable viscous products, oil, paint, treacle etc.