

FUEL HOSE REELS/ HOSE



EQUIPCO®

INNOVATIONS IN FUEL HANDLING

www.equipco.com.au
1800 813 182



EVERYTHING FOR FUEL, LUBE AND ADBLUE “COMPLETE”

www.equipco.com.au

FUEL HOSE REELS/ HOSE



EQUIPCO®

INNOVATIONS IN FUEL HANDLING

www.equipco.com.au
1800 813 182



EVERYTHING FOR FUEL, LUBE AND ADBLUE “COMPLETE”

www.equipco.com.au

Fuel Equipment

Hose Reels/Hose

HOSE REELS HAND REWIND

- Heavy duty steel construction designed for long lengths of hose
- Direct crank ratio rewind, gear driven.
- Full flow shaft and swivel.
- 168 PSI W.P. max.
- Female BSP inlet and outlet connections.
- Carbon steel construction as standard.
- Powder coated paint spec.
- All reels are supplied without hose. Optional Hose assemblies available.
- Viton seals.
- Aluminum option for aviation.
- 2" option.

Code	Description
PT25B	Bare Manual Rewind Hose Reel capable of holding up to 1" x 60 Mtr hose
PT32B	Bare Manual Rewind Hose Reel capable of holding up to 1¼" x 50 Mtr hose
PT40B	Bare Manual Rewind Hose Reel capable of holding up to 1½" x 40 Mtr hose



Shown with optional hose, swivel and nozzle

INDUSTRIAL HOSE REELS MANUAL REWIND FOR DIESEL, PETROL, ANTIFREEZE



MHR-600

- Heavy duty Meclube hose reel with rugged welded base all steel bearings are support block with shaft.
- Adjustable roller hose guide with drum lock.
- Suitable for diesel, petrol, antifreeze or oils to 150PSI W.P.
- Suitable for all tank or truck mounting applications.
- Swivelling joint 90° galvanized.
- Viton seals.
- Hose reel capacity ¾" x 45Mtr or 1" x 30Mtr
- Inlet-Outlet - 1" BSPF.

Code	Description
MHR-600	1" inlet / outlet industrial hand rewind hose reel – bare reel. No hose. 150 PSI W.P.
MHR-2515	1" inlet / outlet industrial hand rewind with 15Mtr 1" Rubber hose for diesel. 150 PSI W.P.
MHR-2520	1" inlet / outlet industrial hand rewind with 20Mtr 1" Rubber hose for diesel. 150 PSI W.P.

HOSE REELS HAND REWIND



HRS-10

HRS-B

- Hand rewind hose reel.
- Suit 10 Mtr x 1" or 20 Mtr x ¾" Hose.
- Bare reel only.
- Diesel use only.

HRL-B

- Hand rewind hose reel.
- Suit 20 Mtr x 1" Hose.
- Bare reel only.
- Diesel use only.

HRS-10

- Hand rewind hose reel.
- Entry level model for contractors.
- Supplied with 10 Mtr x 1" Rubber hose, and automatic diesel high flow nozzle.
- Powdercoated steel construction.
- Diesel use only.

HRL-20

- Hand rewind hose reel.
- Entry level model for contractors.
- Supplied with 20 Mtr x 1" Rubber hose, and automatic diesel high flow nozzle.
- Powdercoated steel construction.
- Diesel use only.

Code	Description
HRS-10	Hand rewind hose reel with 10 Mtr x 1" Hose and automatic nozzle.
HRS-B	Hand rewind hose reel without hose. Bare reel only.
HRL-20	Hand rewind hose reel with 20 Mtr x 1" Hose and automatic nozzle.
HRL-B	Hand rewind hose reel without hose. Bare reel only. Suit 20 Mtr x 1" Hose.

MECLUBE HOSE REELS

MD2510

- Heavy Duty M-Series Hose Reel
- Fitted with 10 Mtr of 1" hose
- Rated to 150 PSI.
- Full Steel Construction – Perfect for Transport Applications
- Viton Seals
- Diesel only



MD15B

- Heavy Duty M-Series Hose Reel
- Bare reel Capable of holding up to 15 Mtr of 1" hose.
- Rated to 150 PSI.
- Full Steel Construction – Perfect for transport Applications
- Viton Seals
- Diesel only



MD10B

- Heavy Duty M-Series Hose Reel
- Bare reel Capable of holding up to 10 Mtr of 1" hose.
- Rated to 150 PSI.
- Full Steel Construction – Perfect for transport Applications
- Viton Seals
- Diesel only



MD2530

- Heavy Duty M-Series Hose Reel
- Fitted with 30 Mtr of 1" hose
- Full Steel Construction – Perfect for transport Applications
- Viton Seals
- Diesel only
- Rated to 150 PSI



MD2515

- Heavy Duty M-Series Hose Reel
- Fitted with 15 Mtr of 1" hose
- Full Steel Construction – Perfect for transport Applications
- Viton Seals
- Diesel only
- Rated to 150 PSI



Code	Description
MD10B	High quality steel spring rewind hose reel capable of holding up to 10 Mtr of 1" hose - Diesel only. Bare Reel.
MD15B	High quality steel spring rewind hose reel capable of holding up to 15 Mtr of 1" hose - Diesel only. Bare Reel.
MD30B	High quality steel spring rewind hose reel capable of holding up to 30 Mtr of 1" hose - Diesel only. Bare Reel.
MD2510	Meclube steel spring rewind steel twin post with 10 Mtr of 1" hose. Diesel use only.
MD2515	Meclube steel spring rewind steel twin post with 15 Mtr of 1" hose. Diesel use only.
MD2530	Meclube steel spring rewind steel twin post with 30 Mtr of 1" hose. Diesel use only.





GRACO XD SERIES MOTORISED HOSE REELS

We like to think of the XD Motor Rewind Reels as Super-Powered. The innovative design is packed with features to help you work safer, smarter and faster. We demand extensive product testing, often exceeding industry standards to ensure you get the best product on the market. Plus, it's all backed with an industry leading warranty and support after your purchase.

Power for Larger Diameter and Longer Hose Lengths

- Direct drive motor options include hydraulic, pneumatic and 24 Volt
- Available in 594 PSI low pressure and 3000 PSI medium pressure models
- Operating temperature range of -40 to 82° C*
- Adjustable band clamp brake used to slow and stop reel
- For Air, Water, Oil, Grease, Diesel and Waste Oil Evacuation
- Optional roller guides and arms available as accessories
- Optional BSPP and BSPT conversion kits

XD Series Motorized Reels

- More uptime due to less maintenance
- Eliminates the chains which are dangerous to the operator
- No need to purchase additional chain guards
- Lubed for life, no need to lubricate drive
- Cleaner installations
- Hydraulic 1:1 ratio motor is more efficient and provides easier retraction over chain drive designs
- Easily stock components for faster, in the field service
- Simple to configure for right or left hand inlet
- Outlet minimizes hose kinking for an even, smooth wrap


XD™ Series Reels

Spend Less Time and Money on Service

Tested tough to perform when you need it. Constructed with quality materials for long lasting performance to help reduce downtime. Changing motors is easy so you get up and running fast.

Top Quality Solutions for:

- Mining Operations
- Oil and Gas
- Agriculture
- Sewer and Waste Water
- Transportation

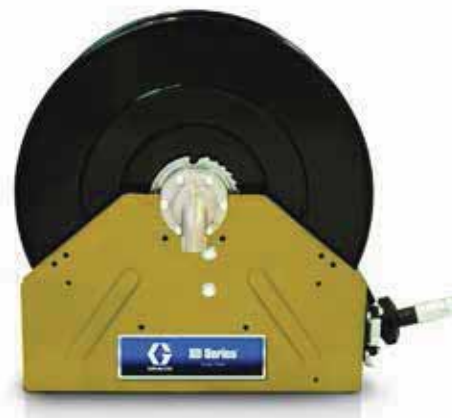

Code	Description
24P318	Graco XD40 reel, bare. For Air/Water, waste oil evacuation and diesel.
24P343	Graco XD40 hose reel for oil with 3/4" x 23 Mtr. 1500 PSI.
24P355	Graco XD40 series hose reel . 15 Mtr x 1" Diesel reel. Max 250 PSI
24P455	XD50 Graco hose reel for air/water and diesel. 600 PSI. Hose capacity up to 1" x 30 Mtr. Supplied without hose. Blue
24P456	XD50 Graco hose reel for air/water and diesel. 600 PSI. Hose capacity up to 1" x 30 Mtr. Supplied without hose. Yellow
24P461	XD50 Graco spring rewind hose reel. Supplied without hose. Suit up to 15 Mtr x 1 1/4" hose. 1 1/2" Inlet/outlet.
24T024	XD7020 Pneumatic Motor. Hose capacity 2"x10 Mtr. For diesel.
24R532	XD8010 Pneumatic Motor. Hose capacity 1"x46 Mtr. For diesel.
24R562	XD8015 Pneumatic Motor. Hose capacity 1.5"x23 Mtr or 1.5"x50 Mtr. For diesel.
24R577	XD8020 Pneumatic Motor. Hose capacity 2"x15 Mtr. For diesel.
24T015	XD7020 24 VDC Electric Motor, 1/2 HP. capacity 2"x33 Mtr. For diesel.
24R523	XD8010, 24 VDC Electric Motor, 1/2 HP. capacity 1"x150 Mtr. For diesel.
24R553	XD8015 24 VAC Electric Motor, 1/2 HP. capacity 1.5"x100 Mtr or 1.5"x75 Mtr. For diesel.
24R568	XD8020 24 VDC Electric Motor, 1/2 HP capacity 1 2"x50 Mtr. For diesel.

HEAVY DUTY LARGE CAPACITY HOSE REELS

Heavy duty large capacity hose reels are built to handle large hose diameters. Used in applications demanding large volume delivery in low and medium pressures such as diesel fuel. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

Design & Structure

- Long lasting self-lubricating flange bearings.
- Reinforced steel frame provides maximum strength and stability.
- Auto spring rewind easily wraps, stores and protects hose.
- Full flow swivel for maximum product delivery.
- Viton seals

Code	Description
CX4P-750	1½" Inlet/Outlet Cox heavy duty high capacity spring rewind hose reel - bare reel, no hose. Will handle 15 Mtr x 1½" Hose. 250 PSI max pressure. Suit high flow diesel use.
CX4P-3215	1½" Inlet/Outlet Cox heavy duty hose reel supplied with 15 Mtr x 1½" Hose for diesel high volume transfer. 150 PSI max pressure.
CX5P-850	1½" Inlet/Outlet Cox heavy duty high capacity spring rewind hose reel - bare reel, no hose. Will handle 15 Mtr x 1½" Hose. 250 PSI max pressure. Suit high flow diesel use.
CX5P-4015	1½" Inlet/Outlet Cox heavy duty hose reel supplied with 15 Mtr x 1½" Hose for diesel high volume transfer. 150 PSI max pressure.

ATEX APPROVED HOSE REELS

- Atex approved heavy duty dual pedestal hose reel.
- Suitable for use in some hazardous zones.
- Standard models suitable for petrol, diesel, kerosene and oil.
- Models available for use with aviation fuels.
- Retracting fuel hose reel rated Atex 94/9 IIB 2GD c T4 T135°C X

Code	Description
AAHR-15B	Atex approved reel, suit 15 Mtr x 1" hose - bare reel, no hose. Retracting fuel hose reel rated Atex 94/9 IIB 2GD c T4 T135°C X
AAHR-30B	Atex approved reel, suit 30 Mtr x 1" hose - bare reel, no hose. Retracting fuel hose reel rated Atex 94/9 IIB 2GD c T4 T135°C X
AAHRAV-15B	Atex approved reel for aviation fuel, suit 15 Mtr x 1" hose - bare reel, no hose. Stainless steel fluid path. Retracting fuel hose reel rated Atex 94/9 IIB 2GD c T4 T135°C X



RUBBER FUEL DELIVERY HOSE

Code	Description	COIL SIZE	SIZE
MF-020	Rubber fuel delivery hose for pump or gravity applications. Conductive tube with anti-static wire. 150 PSI W.P. 55% aromatic content.	20, 60 Mtr sizes.	¾" (19mm) I.D.
MF-025	Rubber fuel delivery hose for pumps or gravity use. Conductive tube with anti-static wire. 150 PSI W.P. 55% aromatic content	20, 60 Mtr sizes.	1" (25mm) I.D.
MF-032	Rubber fuel delivery hose for pump or gravity use. Conductive tube with anti-static wire. 150 PSI W.P. 55% aromatic content	20, 40 Mtr sizes.	1¼" (32mm) I.D.

Robust fuel transfer hose for use with diesel and petrol fuels up to 55% aromatic content. Long life durable hose for contractor pumps and industrial use. Smooth extruded rubber tube cover with fabric braid.



RUBBER SUCTION HOSE WITH WIRE HELIX FOR PETROL/DIESEL

Fuel suction hose for heavy duty pump applications.

Code	Description
PP25S	1" Suction hose with wire helix for petrol/diesel.
PP40S	1½" Suction hose with wire helix for petrol/diesel.



RUBBER HOSE FOR INDUSTRIAL TANKS - REFUELING SYSTEMS AND TANKER TRUCK HOSE REELS

Rubber fuel delivery hose for industrial tanks - transport operators, mining, earthmoving and specific tanker truck applications.

Code	Description
PRP25AGT658	Extra heavy duty 25mm ID Alfagomma T658 diesel reeling hose, textile braided, 240 PSI max pressure. Suits hose reels and tanker trucks. Diesel use only.
PRP32AGT658	Extra heavy duty 32mm ID Alfagomma T658 diesel reeling hose, textile braided, 240 PSI max pressure. Suits hose reels and tanker trucks. Diesel use only.
PRP40AGT658	Extra heavy duty 40mm ID Alfagomma T658 diesel reeling hose, textile braided, 240 PSI max pressure. Suits hose reels and tanker trucks. Diesel use only.



Crimped hose available

DIESEL FARM PUMP OR GRAVITY TANK HOSE

25RDH

Premium rubber hose for farm tanks and pumps. 100 PSI WP. 1"(25mm ID Hose) Diesel use only.

- All rubber compounds for long life in the sun or cold climates. Suitable for use with diesel or oil only.
- W.P. 100 PSI Size 25mm I.D.
- Ideal for pump or gravity fuel delivery applications.
- Not suitable for suction or petrol use.
- Supplied in 20 or 60 Metre rolls or by the Metre.



25RDH

Code	Description
25RDH	1"(25mm ID Hose) Premium rubber hose for farm tanks and pumps. 100 PSI WP. Diesel use only.

BOWSER HOSE & REUSABLE FITTINGS

Hardwall rubber bowser hose with steel wrapped braid for use on commercial and industrial bowser or other applications requiring an extremely durable fuel hose.

Code	Description
DFE16	Hardwall bowser hose 16 mm (5/8") I.D W.P. 170 PSI.
DFE19	Hardwall bowser hose 19 mm (3/4") I.D W.P. 170 PSI.
DFE25	Hardwall bowser hose 25 mm (1") I.D W.P. 170 PSI.
DGR16	Reusable bowser fitting suits 16 mm hose - 3/4" BSP Male
DGR19	Reusable bowser fitting suits 19 mm hose - 3/4" BSP Male
DGR25	Reusable bowser fitting suits 25 mm hose - 1" BSP Male



DFE16/19/25



DGR16/19/25

PVC SUCTION HOSE

PVC diesel-oil suction hose for connecting pumps to bulk tanks. Ribbed construction with highly flexible polymers for ease of use.



Code	Description	Coil size	W.P max
PO25	PVC 1" (25mm) I.D black suction hose for oils and diesel	20mt	95 PSI
PO32	PVC 1 1/4" (32mm) I.D black suction hose for oils and diesel	20mt	95 PSI
PO40	PVC 1 1/2" (40mm) I.D black suction hose for oils and diesel	20mt	80 PSI
PO50	PVC 2" (50mm) I.D black suction hose for oils and diesel	20mt	65 PSI
PO80	PVC 3" (75mm) I.D black suction hose for oils and diesel	20mt	65 PSI

AVIATION HOSE/BOLT CLAMP HOSE TAILS

Code	Description
AVPRP25D	1" Aviation approved hose
AVPRP32D	1 1/4" Aviation refuelling hose.
AVX25FC	1" BSP female - with pin clamp
AVX32FC	1 1/4" BSP female - with pin clamp
AVX25MC	1" BSP male - with pin clamp
AVX32MC	1 1/4" BSP male - with pin clamp.

- Aviation certified fuel delivery hose.
- 1" or 1 1/4" options.
- Hose tail clamps must be used with this aviation hose.



HOSEBUN HOSE HANGERS



Used in various industrial, commercial sites and applications including:


- The petrochemical industry
- Oil and gas drilling applications
- Hi-hose refuelling stations
- Overland/offshore shipping & transportation settings
- Military & aircraft refuelling depots

Code	Description
HBH-25	Hose hanger for 1" (25mm) hose
HBH-32	Hose hanger for 1 1/4" (32mm) hose
HBH-40	Hose hanger for 1 1/2" (40mm) hose
HBH-50	Hose hanger for 2" (50mm) hose

COUNTERWEIGHTED HOSE RETRIEVER

HR50

- Counterweighted hose retractor to suit 2" pipe. 9 Kilo counterweight eliminates the work in pulling hose into refueling position. Retracts hose out of the way after use. Keeps hose straightened out, preventing damaging buckling.
- Swivel Head permits faster, easier servicing in any direction.
- Pulley Wheel allows hose to be pulled down or retrieved without binding.
- Heavy Duty Construction built for years of rough handling.
- Strong Rustproof Cable and Hose Clamps.
- Easy Installation requires only a couple of hours, no special skill needed. Can be installed at island unit or adjacent to a wall.
- Increases the life of your Petroleum Hoses.
- 2" BSP threaded pipe and base plate to complete installation not included.

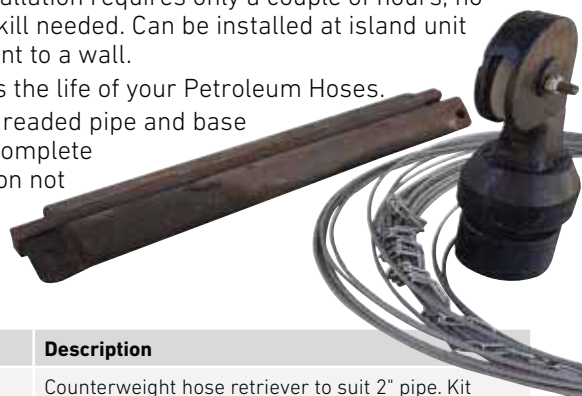

Code	Description
HR50	Counterweight hose retriever to suit 2" pipe. Kit includes swivel head with pulley wheel, 10 Mtr wire cable and counter weight.