

OIL EQUIPMENT



EQUIPCO®

INNOVATIONS IN FUEL HANDLING

www.equipco.com.au

1800 813 182



EVERYTHING FOR FUEL, LUBE AND ADBLUE "COMPLETE"

www.equipco.com.au



Oil - Lubrication Equipment Contents



Hand Pumps

76

Lube Nozzle Systems

88



Oil Nozzles

77

Lube Flow Meters

89



Air Op Pumps Kits

78-80

Hose Reels/Hose

90



Trolley Kits

81

Grease-Lube Fittings

91



IBC Kits

82-83

Grease Nipples

92



Lube Gear Pumps

84

Grease Kits

93




Air Operated
Diaphragm Pumps

85

Grease Guns

94



Workshop Fitout

86

Waste Oil Tanks

95



Graco Specialised
Products

87

Service Truck Tanks

96



20 LITRE GEAR OIL PUMP

E221N

- 10 strokes per Litre
- Suits 20 Ltr steel or some plastic oil drums
- Rieke adaptor

| Code | Description |
|-------|-----------------------------------|
| E220N | 20 Litre pump with spout. |
| E221N | 20 Litre gear oil pump with hose |
| E231 | 60 Litre gear oil pump with hose. |



CAST IRON LITRE STROKE PUMP WITH OIL DISCHARGE PORT

FM Series

- Heavy duty cast iron lever stroke piston pump for use with drums or tanks.
- 1 litre per return stroke.
- Heavy duty construction for years of trouble free use.
- Suits use with diesel, petrol, oils and ethanol blends up to E85.
- Self priming action.
- Suits connection to underground tanks.
- Threaded inlet/outlet ports.
- Nozzle spout holder.
- Lever handle lock.

FM-OD

Cast iron litre stroke pump with oil discharge port for filling oil bottles or containers.



| Code | Description |
|-------|--|
| FM-OD | Cast iron litre stroke pump with oil discharge port |
| FM-B | Cast iron litre stroke pump with suction pipe for 205 Ltr drums or tanks. 1 Ltr per return stroke |
| FM-AP | Cast iron litre stroke pump with suction pipe for 205 Ltr drums or tanks, 3 Mtr anti static rubber hose and spout for unleaded petrol, diesel or oils. |

FUEL OIL PUMPS

- Heavy duty cast iron rotary pump with cast iron vanes. Viton seals.
- 20 LPM max flow
- Use with diesel, petrol, light weight oil and kerosene.
- Complete with suction tube, 2" cast iron bung nut with rubber boot and spout holster.



| Code | Description |
|-----------|--|
| DP202VR | Cast iron rotary pump with viton seals, suction pipe and bung nut. |
| DP202VRHA | Cast iron rotary pump with viton seals, suction pipe, bung nut 2 Mtr anti static hose and spout for unleaded petrol, diesel and light weight oil |



XDV20 GRACO OIL VALVE - FLEXIBLE EXTENSION

247723

- XDV20 Graco oil control valve.
- ¾" Inlet.
- 76 LPM max flow.
- 1500 PSI max pressure.
- Heavy duty mining grade.



| Code | Description |
|--------|--|
| 247723 | XDV20 Graco oil valve - flexible extension |

DIGITAL OIL NOZZLE - FLEXIBLE EXTENSION

EOM400F

- Digital metered oil nozzle, for service bays.
- Flexible extension
- Non-drip tip and ½" swivel.
- Lever lock mechanism.
- Up to 30 LPM.
- Accuracy ± .5%
- Minimum operating pressure 4.35 PSI
- Viscosity (mPas) 8 - 5000
- 1015 PSI



| Code | Description |
|---------|-----------------------------------|
| EOM400F | Oil control gun - rigid extension |

OIL CONTROL GUN

MLN-12F

- Oil control gun.
- Non-drip tip and ½" hose swivel.
- Flexible extension.



MLN-12F

| Code | Description |
|---------|--------------------------------------|
| MLN-12F | Oil control gun - flexible extension |

PRESET DIGITAL METERED OIL NOZZLE

K500

- Digital preset metered oil nozzle.
- Adjustable swivel spout.
- Enables automatic shut off at desired quantity.
- Accuracy ± .5%.
- ½" Swivel connection.
- Up to 994 PSI max pressure.



| Code | Description |
|------|------------------------------------|
| K500 | Preset digital metered oil nozzle. |

MECHANICAL OIL METER VALVE - FLEXIBLE EXTENSION

K40F

- Mechanical oil nozzle Meter for demanding industrial use
- Robust quality - no batteries.
- Accurate to ± 1%.
- Non-drip tip and ½" swivel.
- Up to 30 LPM flow rate.
- 1015 PSI max pressure.



| Code | Description |
|------|---|
| K40F | Mechanical oil meter valve - flexible extension |





MECLUBE PUMP TO SUIT 200 LTR DRUM

ML1120

- 1:1 ratio Meclube air operated pump to suit 205 Ltr drum. Optional extended suction for bulk tanks.
- Italian made.
- Suitable for very light weight oils.
- 40 LPM max free flow (SAE30 oil at 87 PSI).
- Suction assembly to suit 205 Ltr drums.
- ¼" BSP air inlet.
- ½" BSP oil outlet.
- Air consumption 220 LPM.



ML3120

- 3:1 ratio Meclube air operated pump to suit 205 Ltr drum. Optional extended suction for bulk tanks.
- Italian made.
- Suitable for transferring medium and light weight oils.
- 25 LPM max free flow (SAE30 oil at 87 PSI).
- Suction assembly to suit 205 Ltr steel drums.
- ¼" BSP air inlet.
- ½" BSP oil outlet.
- Air consumption 200 LPM.

ML5120

- 5:1 ratio Meclube air operated pump to suit 205 Ltr drum. Optional extended suction for bulk tanks.
- Italian made.
- Suitable for transferring heavy, medium and light weight oils.
- 28 LPM max free flow (SAE30 oil at 87 PSI).
- Suction assembly to suit 205 Ltr steel drums.
- ¼" BSP air inlet.
- ½" BSP oil outlet.
- Air consumption 250 LPM.

ML8120

- 8:1 ratio Meclube air operated pump to suit 205 Ltr drum. Optional extended suction for both tanks.
- Italian made.
- Suitable for transferring high viscosity oils.
- 20 LPM max free flow (SAE30 oil at 87 PSI).
- Suction assembly to suit 205 Ltr steel drums.
- ¼" BSP air inlet.
- ½" BSP oil outlet.
- Air consumption 250 LPM.

| Code | Description |
|--------|---|
| ML1120 | 1:1 ratio oil pump with suction for 205 Ltr drum. Up to 40 LPM. |
| ML3120 | 3:1 ratio oil pump with suction for 205 Ltr drum. Up to 25 LPM. |
| ML5120 | 5:1 ratio oil pump with suction for 205 Ltr drum. Up to 28 LPM. |
| ML8120 | 8:1 ratio oil pump with suction for 205 Ltr drum. Up to 20 LPM. |

3:1 PNEUMATIC PUMP

PL192

- Pneumatic oil pump 3:1 ratio
- Includes suction for 205 Ltr drum.
- 22 LPM max.
- Made in Europe

| Code | Description |
|-------|---------------------------------|
| PL192 | 3:1 Pneumatic pump. 22 LPM Max. |



AIR OPERATED OIL PUMP KIT FOR DRUM WITH ON/OFF OIL NOZZLE

- Italian made heavy duty pump.
- Choice of 3:1 and 5:1 ratio to suit your application.
- Include 6 Mtr x ½" oil delivery hose, on/off oil nozzle with flexible spout and non-drip tip, and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.

| Code | Description |
|------------|--|
| ML3120-06F | 3:1 ratio air operated oil pump kit for light to medium weight oils. Includes suction for 205 Ltr drum, 6 Mtr delivery hose, on/off nozzle and filter-reg-lubricator. 25 LPM max flow. |
| ML5120-06F | Same as above but with 5:1 ratio pump. 28 LPM max flow rate. |



AIR OPERATED OIL PUMP KIT FOR DRUM WITH MECHANICAL METERED OIL NOZZLE

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" oil delivery hose, mechanical metered on/off oil nozzle with flexible spout and non-drip tip, and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.



| Code | Description |
|------------|---|
| ML3120-06K | 3:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr hose, mechanical metered oil nozzle and filter-reg-lubricator. 25 LPM max flow |
| ML5120-06K | 5:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr hose, mechanical metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |

OIL PUMP KIT FOR DRUM WITH ELECTRONIC METERED OIL NOZZLE

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" oil delivery hose, electronic metered on/off oil nozzle with flexible spout and non-drip tip, and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.



| Code | Description |
|------------|---|
| ML3120-06E | 3:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr hose, electronic metered oil nozzle and filter-reg-lubricator. 25 LPM max. |
| ML5120-06E | 5:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr hose, electronic metered oil nozzle and filter-reg-lubricator. 28 LPM max. |

OIL PUMP KIT FOR DRUM WITH PRESET METERED OIL NOZZLE

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" oil delivery hose, preset metered oil nozzle and non-drip tip, and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.



| Code | Description |
|-------------|--|
| ML3120-06K5 | 3:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr delivery hose, preset metered oil nozzle and filter-reg-lubricator. 25 LPM max. |
| ML5120-06K5 | 5:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr delivery hose, preset metered oil nozzle and filter-reg-lubricator. 28 LPM max. |



AIR OPERATED OIL PUMP KIT FOR DRUM WITH HOSE REEL AND MECHANICAL METERED OIL NOZZLE.


- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" lead hose, 15 Mtr spring rewind hose reel, mechanical metered oil nozzle with flexible spout and non-drip tip and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.



| Code | Description |
|-------------|--|
| ML3120-Y15K | 3:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr lead hose, 15 Mtr hose reel, mechanical metered oil nozzle and filter-reg-lubricator. 25 LPM max. |
| ML5120-Y15K | 5:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr lead hose, 15 Mtr hose reel, mechanical metered oil nozzle and filter-reg-lubricator. 28 LPM max. |

OIL PUMP KIT FOR DRUM WITH ELECTRONIC METERED OIL NOZZLE

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" lead hose, 15 Mtr spring rewind hose reel, electronic metered oil nozzle with flexible spout and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.

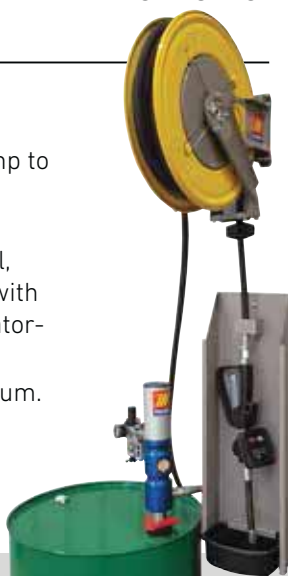

| Code | Description |
|-------------|--|
| ML3120-Y15E | 3:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr lead hose, 15 Mtr hose reel, electronic metered oil nozzle and filter-regulator-lubricator. 25 LPM max. |
| ML5120-Y15E | 5:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr lead hose, 15 Mtr hose reel, electronic metered oil nozzle and filter-regulator-lubricator. 28 LPM max. |

OIL PUMP KIT FOR DRUM WITH PRESET METERED OIL NOZZLE

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" lead hose, 15 Mtr spring rewind hose reel, preset metered oil nozzle with flexible spout and filter-regulator-lubricator.
- Includes suction for 205 Ltr drum.



| Code | Description |
|--------------|--|
| ML3120-Y15K5 | 3:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr lead hose, 15 Mtr hose reel, preset metered oil nozzle and filter-regulator-lubricator. 25 LPM max. |
| ML5120-Y15K5 | 5:1 ratio air operated oil pump kit. Complete with suction for 205 Ltr drum, 6 Mtr lead hose, 15 Mtr hose reel, preset metered oil nozzle and filter-regulator-lubricator. 28 LPM max. |



MECLUBE AIR OP OIL PUMP TROLLEY KIT

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes MAY200 trolley with 6 Mtr x ½" oil delivery kit, filter-regulator-lubricator and options of mechanical, or electronic, or preset metered oil nozzles with non-drip tip.
- Includes suction for 205 Ltr drum.



Photo is MAY200-M51-06K model

OIL PUMP TROLLEY KIT WITH REEL

- Italian made heavy duty air operated oil pump.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes MAY200 trolley with 6 Mtr x ½" feed hose, 15 Mtr hose reel spring rewind, filter-regulator-lubricator and options of mechanical, or electronic, or preset metered oil nozzles with non-drip tip.
- Includes suction for 205 Ltr drum.



Photo is MAY200-M51-H15K model

| Code | Description |
|-----------------|---|
| MAY200-M31-06K | 3:1 ratio air operated oil pump kit with suction for 205 Ltr drum, 6 Mtr delivery hose, mechanical metered oil nozzle, filter-reg-lubricator and MAY200 trolley. 25 LPM max flow. |
| MAY200-M51-06K | 5:1 ratio air operated oil pump kit with suction for 205 Ltr drum, 6 Mtr delivery hose, mechanical metered oil nozzle, filter-reg-lubricator and MAY200 trolley. 28 LPM max flow. |
| MAY200-M31-06E | 3:1 ratio air operated oil pump kit with suction for 205 Ltr drum, 6 Mtr delivery hose, electronic metered oil nozzle, filter-reg-lubricator and MAY200 trolley. 25 LPM max flow. |
| MAY200-M51-06E | 5:1 ratio air operated oil pump kit with suction for 205 Ltr drum, 6 Mtr delivery hose, electronic metered oil nozzle, filter-reg-lubricator and MAY200 trolley. 28 LPM max flow. |
| MAY200-M31-06K5 | 3:1 ratio air operated oil pump kit with suction for 205 Ltr drum, 6 Mtr delivery hose, preset metered oil nozzle, filter-reg-lubricator and MAY200 trolley. 25 LPM max flow. |
| MAY200-M51-06K5 | 5:1 ratio air operated oil pump kit with suction for 205 Ltr drum, 6 Mtr delivery hose, preset metered oil nozzle, filter-reg-lubricator and MAY200 trolley. 28 LPM max flow. |

| Code | Description |
|------------------|---|
| MAY200-M31-H15K | 3:1 ratio air operated oil pump kit with suction for 205 Ltr drum, MAY200 trolley, 6 Mtr feed hose, 15 Mtr hose reel, filter-reg-lubricator and mechanical metered oil nozzle. 25 LPM max flow. |
| MAY200-M51-H15K | 5:1 ratio air operated oil pump kit with suction for 205 Ltr drum, MAY200 trolley, 6 Mtr feed hose, 15 Mtr hose reel, filter-reg-lubricator and mechanical metered oil nozzle. 28 LPM max flow. |
| MAY200-M31-H15E | 3:1 ratio air operated oil pump kit with suction for 205 Ltr drum, MAY200 trolley, 6 Mtr feed hose, 15 Mtr hose reel, filter-reg-lubricator and electronic metered oil nozzle. 25 LPM max flow. |
| MAY200-M51-H15E | 5:1 ratio air operated oil pump kit with suction for 205 Ltr drum, MAY200 trolley, 6 Mtr feed hose, 15 Mtr hose reel, filter-reg-lubricator and electronic metered oil nozzle. 28 LPM max flow. |
| MAY200-M31-H15K5 | 3:1 ratio air operated oil pump kit with suction for 205 Ltr drum, MAY200 trolley, 6 Mtr feed hose, 15 Mtr hose reel, filter-reg-lubricator and preset metered oil nozzle. 25 LPM max flow. |
| MAY200-M51-H15K5 | 5:1 ratio air operated oil pump kit with suction for 205 Ltr drum, MAY200 trolley, 6 Mtr feed hose, 15 Mtr hose reel, filter-reg-lubricator and preset metered oil nozzle. 28 LPM max flow. |



AIR OPERATED IBC KITS TOP MOUNT

- Italian made heavy duty air operated oil pump for top mount on IBC.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" delivery hose, filter-regulator-lubricator, and options of mechanical or electronic, or preset metered oil nozzle with non-drip tip and nozzle holder with drip tray .
- Includes suction for 1000 Ltr IBC.

Photo is
MIBL5120-06K
model



AIR OPERATED IBC KITS TOP MOUNT WITH HOSE REEL

- Italian made heavy duty air operated oil pump for top mount on IBC, with hose reel.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 2 Mtr x ½" reel feed hose, 15 Mtr heavy duty spring rewind hose reel with top mount IBC bracket, filter-regulator-lubricator, and options of mechanical or electronic, or preset metered oil nozzle with non-drip tips and nozzle holder with drip tray.
- Includes suction for 1000 Ltr IBC

Photo is
HMIB5120-15K
model



| Code | Description |
|---------------|---|
| MIBL3120-06K | 3:1 ratio air operated oil pump kit. Complete with suction for top mount IBC, 6 Mtr delivery hose, mechanical metered oil nozzle and filter-reg-lubricator. 25 LPM max flow |
| MIBL5120-06K | 5:1 ratio air operated oil pump kit. Complete with suction for top mount IBC, 6 Mtr delivery hose, mechanical metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |
| MIBL3120-06E | 3:1 ratio air operated oil pump kit. Complete with suction for top mount IBC, 6 Mtr delivery hose, electronic metered oil nozzle and filter-reg-lubricator. 25 LPM max flow |
| MIBL5120-06E | 5:1 ratio air operated oil pump kit. Complete with suction for top mount IBC, 6 Mtr delivery hose, electronic metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |
| MIBL3120-06K5 | 3:1 ratio air operated oil pump kit. Complete with suction for top mount IBC, 6 Mtr delivery hose, preset metered oil nozzle and filter-reg-lubricator. 25 LPM max flow |
| MIBL5120-06K5 | 5:1 ratio air operated oil pump kit. Complete with suction for top mount IBC, 6 Mtr delivery hose, preset metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |

| Code | Description |
|---------------|--|
| HMIB3120-15K | 3:1 ratio air operated oil pump kit complete with suction for top mount IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC bracket, mechanical metered oil nozzle and filter-reg-lubricator. 25 LPM max flow |
| HMIB5120-15K | 5:1 ratio air operated oil pump kit complete with suction for top mount IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC bracket, mechanical metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |
| HMIB3120-15E | 3:1 ratio air operated oil pump kit complete with suction for top mount IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC bracket, electronic metered oil nozzle and filter-reg-lubricator. 25 LPM max flow |
| HMIB5120-15E | 5:1 ratio air operated oil pump kit complete with suction for top mount IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC bracket, electronic metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |
| HMIB3120-15K5 | 3:1 ratio air operated oil pump kit complete with suction for top mount IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC bracket, preset metered oil nozzle and filter-reg-lubricator. 25LPM max flow |
| HMIB5120-15K5 | 5:1 ratio air operated oil pump kit complete with suction for top mount IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC bracket, preset metered oil nozzle and filter-reg-lubricator. 28 LPM max flow |

AIR OPERATED IBC KITS SIDE MOUNT PUMPS

- Italian made heavy duty air operated oil pump for side mount on IBC.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 6 Mtr x ½" delivery hose, filter-regulator-lubricator, IBC side mount, plate with drip tray, and options of mechanical or electronic, or preset metered oil nozzle with non-drip tip.
- Includes bottom suction for 1000 Ltr IBC.

Photo is
MIBLS3120-06K
model



| Code | Description |
|----------------|--|
| MIBLS3120-06K | 3:1 ratio air operated side mount oil pump kit. Complete with bottom suction on IBC, 6 Mtr delivery hose, mechanical metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 25 LPM max flow |
| MIBLS5120-06K | 5:1 ratio air operated side mount oil pump kit. Complete with bottom suction on IBC, 6 Mtr delivery hose, mechanical metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 28 LPM max flow |
| MIBLS3120-06E | 3:1 ratio air operated side mount oil pump kit. Complete with bottom suction on IBC, 6 Mtr delivery hose, electronic metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 25 LPM max flow |
| MIBLS5120-06E | 5:1 ratio air operated side mount oil pump kit. Complete with bottom suction on IBC, 6 Mtr delivery hose, electronic metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 28 LPM max flow |
| MIBLS3120-06K5 | 3:1 ratio air operated side mount oil pump kit. Complete with bottom suction on IBC, 6 Mtr delivery hose, preset metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 25 LPM max flow |
| MIBLS5120-06K5 | 5:1 ratio air operated side mount oil pump kit. Complete with bottom suction on IBC, 6 Mtr delivery hose, preset metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 28 LPM max flow |

AIR OPERATED IBC KITS SIDE MOUNT PUMPS WITH HOSE REEL

- Italian made heavy duty air operated oil pump for side mount on IBC.
- Choice of 3:1 and 5:1 ratio pump to suit your application.
- Includes 2 Mtr x ½" reel feed hose, 15 Mtr heavy duty spring rewind hose reel with top mount IBC hose reel bracket, IBC side mount pump with drip tray, filter-regulator-lubricator, and options of mechanical or electronic, or preset metered oil nozzle with non-drip tips.
- Includes bottom suction for 1000 Ltr IBC.

Photo is HMIBS5120-15K model



| Code | Description |
|----------------|---|
| HMIBS3120-15K | 3:1 ratio air operated side mount oil pump kit complete with bottom suction on IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC hose reel bracket, mechanical metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 25 LPM max flow |
| HMIBS5120-15K | 5:1 ratio air operated side mount oil pump kit complete with bottom suction on IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC hose reel bracket, mechanical metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 28 LPM max flow |
| HMIBS3120-15E | 3:1 ratio air operated side mount oil pump kit complete with bottom suction on IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC hose reel bracket, electronic metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 25 LPM max flow |
| HMIBS5120-15E | 5:1 ratio air operated side mount oil pump kit complete with bottom suction on IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC hose reel bracket, electronic metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 28 LPM max flow |
| HMIBS3120-15K5 | 3:1 ratio air operated side mount oil pump kit complete with bottom suction on IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC hose reel bracket, preset metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 25 LPM max flow |
| HMIBS5120-15K5 | 5:1 ratio air operated side mount oil pump kit complete with bottom suction on IBC, 2 Mtr reel feed hose, 15 Mtr hose reel with top mount IBC hose reel bracket, preset metered oil nozzle, side mount pump plate with drip tray and filter-reg-lubricator. 28 LPM max flow |

240 VOLT ITALIAN MADE SELF PRIMING BRONZE GEAR PUMP

NM4506

- 240 Volt 10 LPM Max flow self priming bronze gear pump for use with some viscous liquids including lubricants and waste oil.
- In built bypass valve.
- Motor equipped with thermal protection.
- Complete with cable and plug.
- 3/8" BSPF Inlet/Outlet.
- Made in Italy.



| Code | Description |
|--------|---|
| NM4506 | 240 Volt Italian made Self Priming Bronze Gear Pump |

12V SELF PRIMING OIL PUMP. 10 LPM MAX.

G212B

- 12 Volt 10 LPM Max flow self priming bronze gear pump for use with some viscous liquids including lubricants and waste oil.
- In built by-pass valve.
- Complete with cable and clamps.
- 3/8" BSPF Inlet/Outlet.
- Made in Italy.



| Code | Description |
|-------|--|
| G212B | 12 Volt Italian made Self Priming Bronze Gear Pump |

EXTREME DUTY GEAR PUMPS – FOR HIGH AND LOW VISCOSITY OILS

Equipco supply a select range of gear pumps for transferring light and heavy weight oils, we can provide reduction gear boxes with the pump and a complete pump mounted on base with electric motor, coupling and guard.

Contact our sales team today.



ROTARY VANE SELF PRIMING OIL PUMP UP TO 25 LPM

V70

- Rotary vane cast iron transfer pump for new oils with viscosity up to 500 cSt.
- Compact design with high suction capacity.
- 240 Volt powered.
- Continuous operation.
- 25 LPM max flow rate.
- 85 PSI max pressure.
- 1" BSPF Inlet/Outlet ports.
- Self priming.
- Bypass valve.
- Made in Italy.
- Suitable for short transfer applications with large diameter delivery lines only.



| Code | Description |
|------|--|
| V70 | Rotary vane pump - self priming. Up to 25 LPM. |
| V90 | Rotary vane pump - self priming. Up to 50 LPM. |

240 VOLT 1" 2 HP GEAR PUMP

GC240-1

- 1" BSPF self priming cast iron gear pump with 240 Volt 2 HP motor, suitable for pumping waste oil with suction strainer.
- Complete mounted on base with pulleys, belt and guard.
- 50 LPM max flow rate.
- Graphite packing gland.



| Code | Description |
|------------|--|
| GC240-2 | 240 Volt 1" 2 HP Gear Pump. 50 LPM |
| GC240-32-3 | 1 1/4" Gear pump. 240 Volt 3 HP Motor. 15 Amp plug. Up to 100 LPM. |

240 VOLT 1" 2 HP BRONZE GEAR PUMP

BGP240-2

- 1" BSPF self priming bronze gear pump with 240 Volt 2 HP motor, suitable for transferring new oils only.
- Complete mounted on base with pulleys, belt and guard
- 35 LPM max flow.



| Code | Description |
|----------|---|
| BGP240-2 | 1" Bronze gear pump with 2 HP electric motor, base plate, pulley set & guard. |

AIR OPERATED DIAPHRAGM PUMPS



D11021



D3B966



D5A211



D5C277



649001



647121



DF2966



DBCGGG



DFCGGG



DK3GGG



MA110H

MA170H

| Code | Description |
|---|--|
| D11021 | ¼" Graco acetal diaphragm pump with Teflon internals for use with chemicals. 19 LPM max. |
| D150A1 | ¼" Graco PVDF diaphragm pump with Teflon internals for use with chemicals. 19 LPM max. |
| D3B966 | ¾" Graco stainless steel diaphragm pump with santoprene internals for use with chemicals. 26 LPM max. |
| D31211 | ¾" Graco acetal diaphragm pump with Teflon internals for use with chemicals. 26 LPM max. |
| D5B966 | ½" Graco polypropylene diaphragm pump with santoprene internals for use with chemicals. 57 LPM max. |
| D5A211 | ½" Graco acetal diaphragm pump with Teflon internals for use with chemicals. 57 LPM max. |
| D5C255 | ¾" Graco aluminum diaphragm pump with hytrel internals for use with petrol, waster oil and diesel. 61 LPM Max |
| D5C277 | ¾" Graco aluminum diaphragm pump with buna internals for use with waster oil and diesel. 61 LPM Max |
| D5C211 | ¾" Graco aluminum diaphragm pump with Teflon internals for use with petrol and diesel. 61 LPM Max |
| 649001 | 1" Graco polypropylene diaphragm pump with Santoprene internals for use with chemical. 189 LPM max |
| 647121 | 1" Graco aluminum diaphragm pump with geolast internals for use with waste oil and diesel. 189 LPM max |
| 647109 | 1" Graco aluminum diaphragm pump with Teflon internals for use with petrol and diesel. 189 LPM max |
| 647097 | 1" Graco aluminum diaphragm pump with hytrel internals for use with petrol, waste oil and diesel. 189 LPM max |
| DB2966 | 1½" Graco polypropylene diaphragm pump with Santoprene internals for use with chemicals. 378 LPM max |
| DBCGGG | 1½" Graco aluminum diaphragm pump with geolast internals for use with waste oil and diesel. 378 LPM max |
| DBC525 | 1½" Graco aluminum diaphragm pump with hytrel internals for use with petrol, waste oil and diesel. 378 LPM max |
| DF2966 | 2" Graco polypropylene diaphragm pump with Santoprene internals for use with chemicals. 568 LPM max |
| DFCGGG | 2" Graco aluminum diaphragm pump with geolast internals for use with waste oil and diesel. 568 LPM max |
| DF3311 | 2" Graco aluminum diaphragm pump with Teflon internals for use with petrol and diesel. 568 LPM max |
| 652046 | 3" Graco aluminium pump with Geolast elastomers for waste, oil or viscous product transfer. 1041 LPM max |
| *NOTE: 1"- 2" Graco polypropylene pumps have flange mounts. | |
| MA110H | ¾" BSP Aluminium heavy duty air operated double diaphragm pump with NBR diaphragms for transfer of diesel, oil, waste oil and petrol. 110 LPM Max. |
| MA170H | 1" BSP Aluminium heavy duty air operated double diaphragm pump with NBR diaphragms for transfer of diesel, oil waste oil and petrol. 170 LPM Max. |

Fuel Equipment

Oil/Lube Equipment

AdBlue Equipment



WORKSHOP SERVICE PIT LAYOUTS

The permanent disposal system is particularly suitable for workshop pits with limited space and can be adapted to any possible length.

Features:

- Module system complete with screw connections
- Compact pump element with integrated temporary tank for installation in any position
- Double-telescopic collection funnel with cover and splash strainer
- Collection volume, 15 litres per meter



BULK OIL TANKS

500 - 5000 litre oil tanks can be built to suit your bulk oil store for oils, ATF, waste oil and coolants.



OIL MANAGEMENT SYSTEMS


In a professional workshop, you need an advanced Oil Management System that you can rely on. Whether it is dispense monitoring, Data transfer or the upload of vehicle specific fluid level from the Dealer Management System (DMS), the Oil Management System from Equipco guarantees the safe and reliable flow of your data.



Features:

- Reduced waste and loss of oil
- Reduced oil usage tracking issues
- Dispensing history through data logging system
- Intuitive menu navigation

HOSE REEL GANTRY

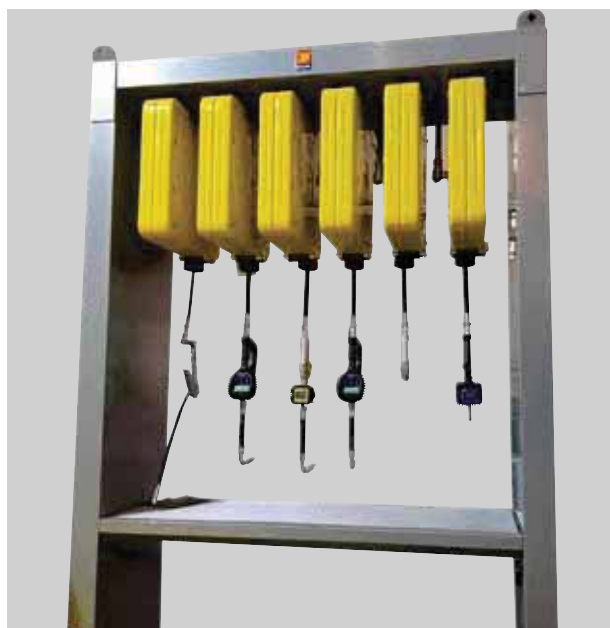

Hose gantry systems allow the mounting of multiple hose reels, waste oil suction devices and oil management systems. Maintenance units can be placed where no wall or intermediate support is available for the installation.



Please contact us with your Graco requirements

World leaders in fluid process equipment, the Graco range is exceptional offering products that are innovative in design with quality and workmanship, proven by time.

PISTON PUMPS

Mini Fire-Ball 225
3:1 7 LPM
Continuous duty flow rate 540 PSI max
1½" Inlet
½" Outlet



Fire-Ball 300 5:1
9.3 LPM
Continuous duty flow rate 900 PSI
1½" Inlet
½" Outlet



Fire-Ball 425 6:1
25.3 LPM
1100 PSI
1½" Inlet
¾" Outlet



FIRE-BALL 300 15:1

- 3 LPM.
- 2700 PSI max pressure.
- ¼" Outlet.



FIRE-BALL 425 10:1

- 13 LPM.
- 1800 PSI max pressure.
- 1" Outlet.



GRACO XD EXTREME-DUTY SERIES HOSE REELS

XD™ Series Reels

Spend less time and money on service
Tested tough to perform when you need it. Constructed with quality materials for long lasting performance to help reduce downtime. Changing motors is easy so you get up and running fast.

- Heavy-duty construction
- Dual pedestal frame provides increased strength for extreme-duty applications.
- Durable steel spool rides on sealed roller bearings to ensure trouble free performance.
- Designed for heavy duty extreme use.

Top Quality Solutions for:

- Mining Operations
- Oil and Gas
- Agriculture
- Sewer and Waste Water
- Transportation



GRACO LD SERIES PLASTIC ENCLOSED

- Spring rewind hose reel.
- Enclosed for safety and protection, extends hose life.
- Flexible mounting options - wall, ceiling, or bench.
- Full flow swivel which allows for maximum fluid flow with minimal pressure drop.

HIGH FLOW PISTON PUMPS

| TYPE | RATIO | FLOW RATE LPM | MOTOR SIZE |
|----------|-------|---------------|------------|
| DURA-FLO | 6:01 | 65.9 | NXT3400 |
| DURA-FLO | 10:01 | 65.9 | NXT6500 |
| DURA-FLO | 12:01 | 34.8 | NXT3400 |
| DURA-FLO | 23:01 | 34.8 | NXT6500 |
| HIGH-FLO | 3.5:1 | 119.2 | NXT3400 |
| HIGH-FLO | 4.5:1 | 87.8 | NXT3400 |
| HIGH-FLO | 6:01 | 119.2 | NXT6500 |



HIGH FLOW AIR OPERATED GREASE PUMPS

| TYPE | RATIO | FLOW RATE LPM | MOTOR SIZE | MAX FLUID PRESSURE PSI |
|------------|-------|---------------|------------|------------------------|
| CHECK-MATE | 14:1 | 26kg | NXT3400 | 1400 PSI |
| CHECK-MATE | 26:1 | 26kg | NXT6500 | 2600 PSI |
| CHECK-MATE | 29:1 | 13kg | NXT3400 | 2900 PSI |
| CHECK-MATE | 55:1 | 13kg | NXT6500 | 5500 PSI |
| CHECK-MATE | 63:1 | 5.2kg | NXT3400 | 4500 PSI |
| CHECK-MATE | 68:1 | 10.4kg | NXT6500 | 5300 PSI |



BANLAW EQUIPMENT LUBE NOZZLE SYSTEMS

Equipco supply a complete range of oil and coolant nozzles and receivers to enable large equipment to be quickly, safely and efficiently sourced from ground level. Most fittings are interchangeable with Wiggins, Fast Fill, Flomax and other compatible systems. A service box is available to allow all fluid connections to be installed in one compact location. The operator can fill and evacuate oil and coolants without contamination or spillage.

| Part # | Description | Max. Flow | Size | Pressure |
|--------|-----------------------|-----------|---------|----------|
| AUS27W | Crankcase receiver | 100 LPM | ¾" NPTM | 1450 PSI |
| AUS29W | Crankcase Nozzle | 100 LPM | ¾" NPTM | 435 PSI |
| AUS41A | Hydraulic Receiver | 30 LPM | ½" NPT | 1450 PSI |
| AUS34A | Hydraulic Nozzle | 30 LPM | ¾" NPT | 615 PSI |
| AUS41A | Transmission Receiver | 100 LPM | ¾" NPT | 1450 PSI |
| AUS33A | Transmission Nozzle | 100 LPM | ¾" NPT | 1450 PSI |
| AUS32A | Coolant Receiver | 40 LPM | ½" NPTM | 1450 PSI |
| AUS36A | Coolant Nozzle | 40 LPM | ¾" NPTM | 1450 PSI |
| AUS38W | Oil Receiver | 100 LPM | ¾" NPT | 1450 PSI |
| AUS39W | Oil Nozzle | 100 LPM | ¾" NPT | 217 PSI |



CRANKCASE OILS



AUS27W Receiver.
AUS29W Nozzle.
Optional Cap/Plug.

HYDRAULIC OILS



AUS41A Receiver.
AUS34A Nozzle.
Optional Cap/Plug.

TRANSMISSION OILS



AUS33A Receiver.
AUS32A Nozzle.
Optional Cap/Plug.

COOLANT FLUIDS



AUS37W Receiver.
AUS36A Nozzle.
Optional Cap/Plug.

OILS



AUS38W Receiver.
AUS39W Nozzle.
Optional Cap.

FLUSH FACE RANGE

Our Flush Face range of couplings are designed to fill and evacuate a wide range of fluids with maximum efficiency.

They contain a superior 'ball-lock' latching system for a stronger lock connection, Dry Break design for reduced spills, and are Flush Faced to minimise the particulate contaminants which make it into the fluid path.

Each set of couplings are colour coded to assist the operator in identifying matched fittings, and only same-colored nozzles and receivers can connect, eliminating fluid cross-contamination.

Sound engineering design focused on the internal fluid path mean the Banlaw Flush Face Range of couplings have a higher flow capability, and allow for more efficient service intervals.



4 DIGIT MECHANICAL METER FLOW METER FOR OIL

EQ150-M

- Suitable for oil w/ High Viscosity PPS rotors
- 1-40 LPM Flow Range
- ½" BSP inlet and outlet
- 580 PSI max pressure
- 1% +/- Accuracy
- Australian Made



| Code | Description |
|---------|---|
| EQ150-M | Meter ½" AL/PPSHV BSP + Mech. 4 Digit mechanical flow meter for oil. |
| EQ250-M | Meter 1" AL/PPSHV BSP + Mech. 4 Digit mechanical flow meter for oil. |
| EQ400-M | Meter 1½" AL/PPSHV BSP + Mech. 4 Digit mechanical flow meter for oil. |
| EQ500-M | Meter 2" AL/PPSHV BSP + Mech. 4 Digit mechanical flow meter for oil. |



PULSE FLOW METERS

EQ25P-P-O

- 1" BSP Aluminium pulse meter with Viton seals and PPS rotors.
- 10 - 150 LPM Flow Range.
- +- 0.5% Accuracy

EQ40P-P-O

- 1 1/2" BSP Aluminium pulse meter with PPS rotors and viton seals.
- 15 - 250 LPM Flow Range.
- +- 0.5% Accuracy

EQ50P-P-O

- 2" BSP Aluminium pulse meter with PPS rotors and viton seals.
- 30 - 500 LPM Flow Range.
- +- 0.5% Accuracy



| Code | Description |
|-----------|--|
| EQ15P-P-O | Meter ½" AL/PPSHV BSP + Pulse. Aluminium body pulse meter for oil. |
| EQ25P-P-O | Meter 1" AL/PPSHV BSP + Pulse. Aluminium body pulse meter for oil. |
| EQ40P-P-O | Meter 1½" AL/PPSHV BSP + Pulse. Aluminium body pulse meter for oil. |
| EQ50P-P-O | Meter 2" AL/PPSHV BSP + Pulse. Aluminium body pulse meter for oil. |
| EQ15SSO-P | Meter ½" IP SS/PPSHV BSP + Pulse. Stainless Steel Pulse meter for high pressure oil transfer. |
| EQ25SSO-P | Meter 1" IP SS/PPSHV BSP + Pulse. Stainless Steel Pulse meter for high pressure oil transfer. |
| EQ40SSO-P | Meter 1½" IP SS/PPSHV BSP + Pulse. Stainless Steel Pulse meter for high pressure oil transfer. |
| EQ50SSO-P | Meter 2" IP SS/PPSHV BSP + Pulse. Stainless Steel Pulse meter for high pressure oil transfer. |
| EQ25HPO-P | Meter 1" IP AL/PPSHV BSP + Pulse. Aluminium pulse meter for high pressure oil transfer. |





HOSE REELS HAND REWIND - BULK OIL SUPPLY

- Heavy duty steel construction designed for long lengths of hose
- Direct crank ratio rewind, gear driven.
- Full flow shaft and swivel.
- 168 PSI W.P max.
- Female BSP inlet and outlet connections.
- Carbon steel construction as standard.
- Powder coated paint spec.
- All reels are supplied without hose. Optional Hose assemblies available.
- Viton seals.
- 2" option.
- Low pressure oil transfer only.

Shown with optional hose, swivel and nozzle



| Code | Description |
|-------|--|
| PT25B | Bare Manual Rewind Hose Reel capable of holding up to 1" x 60 Mtr hose |
| PT32B | Bare Manual Rewind Hose Reel capable of holding up to 1 1/4" x 50 Mtr hose |
| PT40B | Bare Manual Rewind Hose Reel capable of holding up to 1 1/2" x 40 Mtr hose |

OIL /GREASE HOSE REELS

Y01215

- Full steel construction – Perfect for transport
- Italian made
- Fitted with 15 Mtr x 1/2" hose for oil
- Rated to 2240 PSI Max
- Heavy duty spring rewind



| Code | Description |
|--------|--|
| Y01210 | Oil hose reel with 10 Mtr 1/2" hose for oil. Rated to 2240 PSI Max. |
| Y01215 | Oil hose reel with 15 Mtr 1/2" hose for oil. Rated to 2240 PSI Max. |
| Y01220 | Oil hose reel with 20 Mtr of 1/2" hose for oil. Rated to 2240 PSI Max. |
| Y02015 | Oil hose reel with 15 Mtr of 3/4" hose for oil. Rated to 2240 PSI Max. |
| YG0615 | Grease hose reel with 15 Mtr of 1/4" hose for grease. Rated to 8400 PSI Max. |
| YG1015 | Grease hose reel with 15 Mtr of 3/8" hose for grease. Rated to 8400 PSI Max. |

HEAVY DUTY LARGE CAPACITY HOSE REELS

Heavy duty large capacity hose reels are built to handle large hose diameters. Used in applications demanding large volume, delivery in low pressures such as diesel fuel/oil. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

Design & Structure

- Long lasting self-lubricating flange bearings.
- Reinforced steel frame provides maximum strength and stability.
- Viton seals
- Auto spring rewind easily wraps, stores and protects hose.
- Full flow swivel for maximum product delivery.



| Code | Description |
|----------|---|
| CX5P-750 | 1 1/4" Inlet/Outlet Cox heavy duty high capacity spring rewind hose reel - bare reel, no hose. Will handle 15 Mtr x 1 1/4" hose. 250 PSI max pressure. For diesel or low pressure oil use only. |
| CX5P-850 | 1 1/2" Inlet/Outlet Cox heavy duty high capacity spring rewind hose reel - bare reel, no hose. Will handle 15 Mtr x 1 1/2" Hose. 250 PSI max pressure. For diesel or low pressure oil use only. |

Hydraulic hose assemblies for oil and grease made to measure if required. 1 or 2 wire for various working pressures

GREASE HOSE ASSEMBLES

| Code | Description |
|--------|---------------------------------------|
| GHG-1 | 1 Metre hose assembly. 1/4" R2 hose. |
| GHG-2 | 2 Metre hose assembly. 1/4" R2 hose. |
| GHG-3 | 3 Metre hose assembly. 1/4" R2 hose. |
| GHG-4 | 4 Metre hose assembly. 1/4" R2 hose. |
| GHG-6 | 6 Metre hose assembly. 1/4" R2 hose. |
| GHG-8 | 10 Metre hose assembly. 1/4" R2 hose. |
| GHG-15 | 15 Metre hose assembly. 1/4" R2 hose. |



OIL HOSE ASSEMBLES

| Code | Description |
|---------|--|
| OH12-1 | 1 Metre hose assembly for oil 1/2" single wire. |
| OH12-2 | 2 Metre hose assembly for oil 1/2" single wire. |
| OH12-3 | 3 Metre hose assembly for oil 1/2" single wire. |
| OH12-4 | 4 Metre hose assembly for oil 1/2" single wire. |
| OH12-6 | 6 Metre hose assembly for oil 1/2" single wire. |
| OH12-10 | 10 Metre hose assembly for oil 1/2" single wire. |
| OH12-12 | 12 Metre hose assembly for oil 1/2" single wire. |
| OH12-15 | 15 Metre hose assembly for oil 1/2" single wire. |



HYDRAULIC GREASE COUPLERS

Range of grease couplers for guaranteed performance with repeated use.
 Hardened heat treated steel jaws for extended service life.

| Code | Description |
|-------|---|
| HC-14 | 3 jaw S grip couplers. 1/8" BSP |
| 43500 | 4 jaw Coupler with ball check. 1/8" BSP |



GREASE HOSE

| Code | Description |
|-------|--|
| GE-30 | 300mm flex grease extension 1/8" BSP, h/duty |
| GE-45 | 450mm flex grease extension 1/8" BSP, h/duty |
| GE-75 | 750mm flex grease extension 1/8" BSP, h/duty |



GREASE NIPPLE SAFELock COUPLER

SLG4

- The SLG4 "SafeLock" gripper nozzle with 4-jaws of hardened tool steel
- Uncoupling up to 600 bar pressure.
- High performance hydraulic seal
- No splattering when uncoupling
- Integrated linear-rotary swivel joint
- The outer diameter in accordance with DIN
- Integrated check valve
- 1/8" BSP
- Hydraulic Safety
- Made In Germany



| Code | Description |
|------|--|
| SLG4 | Hydraulic Safety grease nipple safelock coupler. |



4 JAW PRECISION COUPLER

HD4G

- Unique design for exact connection to grease nipple
- 4 Jaw precision coupler
- Material steel zinc plated
- Made In Germany

| Code | Description |
|------|-----------------------------------|
| HD4G | 4 jaw Precision coupler. 1/8" BSP |



AQ-449

Needle nose adaptors:
 For dispensing fine line of grease in awkward positions. 38mm long needle with push on nipple connection.



G1-N02

Injector Needle. For sealed bearings. Stainless steel. 21 gauge needle. 38mm needle length.



HCSW3B

- 60° Swivel coupler locks at any 45° position.
- 3 jaw coupler for difficult, hard to access connections.



PCN-1

- Button head coupler to suit 5/8" (16mm) fittings, 1/8" BSP thread. Push on design.



AL-01

- 90° lube adapter:
- For inaccessible shoulders and other confined spaces.



GBC

- Giant button head coupler to suit 7/8" Fittings.
- 1/8" BSP thread.
- Push on design.



| Code | Description |
|--------|---|
| AQ-449 | 4 jaw coupler with ball check |
| G1-N02 | Grease injector needle |
| HCSW3B | 360 degree swivel coupler 3 jaw |
| PCN-1 | Button head coupler - Push on swivel head. |
| AL-01 | 90 degree lube adaptor |
| GBC | Giant button head coupler to suit 7/8" fittings |

GREASE LUBE KIT

GLKIT


- Complete 8 piece kit of adaptors for all lubrication servicing
- 90 degree Lube adaptor x 1
- Extension coupler x 1
- Grease hose 300mm x 1
- Grease hose 500mm x 1
- Grease hose with spring 500mm x 1
- Lockable swivel coupler x 1
- Needle nose grease dispenser x 1
- Needle nozzle x 1



| Code | Description |
|-------|--|
| GLKIT | Complete 8 piece kit of adaptors for all lubrication servicing |

HEADER BLOCKS

| Code | Description |
|-------|---|
| HB31 | 1 Point Header Block With Fittings. 1/8" BSP |
| HB31X | 1 Point Header Block Without Fittings. 1/8" BSP |
| HB32 | 2 Point header block with fittings. 1/8" BSP |
| HB32X | 2 Point header block without fittings. 1/8" BSP |
| HB33 | 3 Point header block with fittings. 1/8" BSP |
| HB33X | 3 Point header block without fittings. 1/8" BSP |
| HB34 | 4 Point header block with fittings. 1/8" BSP |
| HB34X | 4 Point header block without fittings. 1/8" BSP |
| HB35 | 5 Point Header Block With Fittings. 1/8" BSP |
| HB35X | 5 Point Header Block Without Fittings. 1/8" BSP |
| HB36 | 6 Point header block with fittings. 1/8" BSP |
| HB36X | 6 Point header block without fittings. 1/8" BSP |

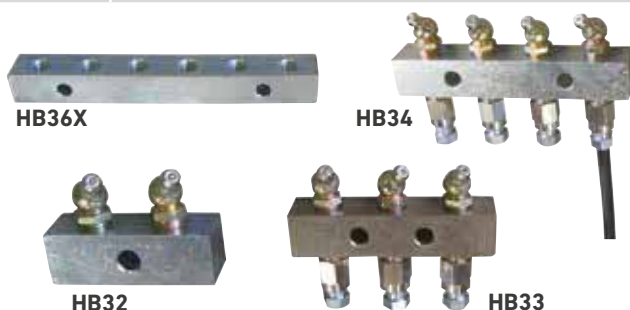


GREASE NIPPLE KITS

| Code | Description |
|-------|--|
| N4671 | Imperial grease nipple assortment kit. |
| N4672 | Metric grease nipple assortment kit. |
| N4674 | Agricultural grease nipple assortment kit. |



GREASE NIPPLE EXTENSION

| Code | Description |
|--------|---|
| C4668D | Grease nipple extension 1/8" BSP x 1/2" long. |
| C4668E | Grease nipple extension 1/8" BSP x 1" long. |
| C4668J | Grease nipple extension 1/8" BSP - 1.5" long. |
| C4668K | Grease nipple extension 1/8" BSP x 2" long. |
| C4668M | Grease nipple extension 1/8" BSP x 3" long. |



ROX 20KG HAND GREASE KIT

RXE20

- Rox EZY-LUBE is a manual operated grease unit to suit 20kg standard grease pail with a unique Han-D-Gun detachable hand piece.
- Can handle grease up to NLGI2.
- Quality Australian made.
- Supplied complete with pail lid, pump, 4 Mtr of hose, follower plate and detachable pressure head hand piece.



| Code | Description |
|-------|--------------------------------------|
| RXE20 | Rox 20 Kg hand grease kit - Ezy Lube |

ROX 25KG HAND GREASE KIT

RXL25

- Rox lube-ette is a manually operated grease unit that comes with a unique Han-D-Gun detachable hand piece.
- Designed to suit standard 2.5kg grease pail.
- Can be used with grease up to NLGI2. When primed, the detachable hand piece can be detached from the hose/pump and is capable of delivering approximately 100 high pressure shots of grease before re-priming.
- Ideal for total mobility.
- Quality Australian made.
- Supplied complete with pail lid, pump, follower plate and detachable pressure head hand piece.



| Code | Description |
|-------|--------------------------------------|
| RXL25 | Rox 2.5 Kg hand grease kit - Lubette |



60:1 RATIO GREASE PUMP KIT

GM121

- 1600 grams per minute max flow.
- Comes with 4 Mtr hose, z swivel, booster gun, drum cover, follower plate and carry handle.
- Suits 20KG grease drum
- Made in Italy

GM121



180KG-220KG GREASE KIT. 60:1RATIO

GM180

- 60:1 ratio high pressure air operated grease kit to suit 180kg (205 Ltr)-220kg drums. Kit includes pump, drum cover, follower plate, 6 Mtr hose, booster gun with Z swivel.
- 1500 grams/minute max tested with NLGI1 grease at 100 PSI
- Made in Italy.



FOLLOWER PLATE FOR TAPERED 20KG PLASTIC DRUMS.

TFP121P



2 WHEEL TROLLEY TO SUIT 20KG DRUM

CA030



TROLLEY FOR 180-220 KG DRUMS

MAY200

- Trolley for 180-220 Kg drums
- 2 fixed wheels Ø200 mm
- 1 swivelling wheel Ø125 mm (equipped with locking device)
- Band for fixed barrels
- Base dimension 600x470 mm
- Made in Italy.



| Code | Description |
|-------------|--|
| GM121 | 60:1 ratio grease pump kit for 20Kg Drums |
| CA030 | 2 wheel trolley to suit 20kg drum. Made in Italy. |
| CA030-GM121 | GM121 grease pump kit with CA030 trolley to suit 20kg containers/drums |
| TFP121P | Tapered follower plate 20kg. Made in Italy. |

| Code | Description |
|---------------|---|
| GM180 | 180 Kg air operated grease pump kit. 60:1 ratio suits 200 Ltr grease drums. |
| MAY200 | Trolley for drums of 180-220 kg 3 wheels yellow colour. Made in Italy. |
| MAY200-GM180 | 180 Kg air operated grease pump kit with MAY200 trolley. |
| MAY200-GM180H | 180 Kg air operated grease pump kit with MAY200 trolley and hose reel. |





THRUSTA® VARIABLE STROKE GREASE GUN

T450V-B

- THRUSTA® variable stroke pistol grip grease gun. Unique design enables high boosting grease pressure with short pump action stroke or full stroke for maximum grease output.
- Variable stroke feature
- 8000 PSI max pressure
- 450 gram cartridge
- 200mm Flexible extension & 4 jaw coupler




| Code | Description |
|---------|--|
| T450V | Thrusta variable stroke pistol grip grease gun, with flex. extension & 4-jaw coupler |
| T450V-B | Thrusta variable stroke pistol grip grease gun, with flex. extension & 4-jaw coupler |

GREASE BOOSTER GUN

BG14R

- Grease Booster Gun.
- 1/4" with rigid extension and coupler

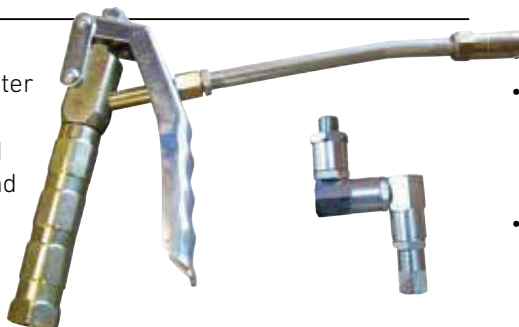

| Code | Description |
|-------|-------------------------------|
| BG14R | Grease booster gun |
| S142 | Multi plane 1/4" M-F Z swivel |

THRUSTA® LEVER ACTION GREASE GUN

T450LG

- THRUSTA® extreme duty lever action grease gun. Heavy-duty cast iron head with dual pressure volume setting.
- Variable stroke feature volume or pressure setting
- 12,000 PSI max pressure
- 450 gram cartridge
- Rigid extension coupler



| Code | Description |
|--------|--|
| T450LG | Thrusta extreme duty lever action grease gun |

18 VOLT CORDLESS GREASE GUN. 450 GRAM

CLGG450-L

- 18 Volt cordless grease gun. 450g.
- Delivers grease up to 80 grams per minute.
- Pressure up to 10,000 PSI.
- Complete with spare battery, 240 Volt charger, plastic moulded carry case and carry strap.
- 18 Volt Li-ion battery



| Code | Description |
|-----------|--|
| CLGG450-L | 18 Volt cordless grease gun with lithium battery |



Optional PPE storage container mounted on waste oil tank

Waste Oil spill tray with sloped floor, liquid seal, mesh screen, hinged lid and gas strut.

Optional Fire extinguisher with bracket

Easy access step for access to fill point or bowser

WASTE OIL TANKS

- Mining Contractors
- Building Industry
- Earthmoving
- Transport
- Marine
- Government
- Agriculture
- Industry

- Designed for the most demanding on-site applications in mining, industry and heavy contracting.
- Equipco Mine-Go self bunded (double wall) all steel fuel tank.
- Constructed to Australian Standards AS1692 and AS1940.
- Pump bay with galvanised lockable hinged door, gas strut, suction ports and return ports.
- 2" Fill and 2" dip point with spill/fill pan, galvanised lockable hinged door and gas strut.
- Incremented fluid level dip stick.
- Baffled to reduce product movement.
- Four way forklift pockets for access to all sides of tank.
- Galvanised lift lugs for empty only handling (optional

- certified lift lugs for lifting when full - available).
- Removable inner tank for ease of inspection and maintenance.
- Galvanised inspection hatch for maintenance and inspection of inner tank.
- Stackable design.
- Designed to fit across truck tray and stack inside shipping containers for ease of transportation.
- Hazchem signage for oil/combustible liquids.
- Vent with riser pipe.
- Supplied painted in white.
- Suitable for waste oil

| Code | Description |
|-----------|--|
| MG1000N-O | Mine-Go 1000 Ltr tank for waste oil / combustible liquids |
| MG2000N-O | Mine-Go 2000 Ltr tank for waste oil / combustible liquids |
| MG3000N-O | Mine-Go 3000 Ltr tank for waste oil / combustible liquids |
| MG5000N-O | Mine-Go 5000 Ltr tank for waste oil / combustible liquids |
| WASTE-P | Waste Oil spill tray with sloped floor, liquid seal, mesh screen and hinged lid. |
| EASTSP-B | Easy access step for access to fill point or bowser |



WASTE-P

SERVICE TRUCK TANKS



2 TO 6 MULTI-COMPARTMENT OIL TANKS

- Multiple compartments
- Pump options
- Hose reels
- Sight gauges
- Forklift slippers
- Metered nozzles
- Level monitoring system
- Tank baffles
- 4 way valve for waste oil



- 900/1000/1200/1300 Ltr total capacity oil tank. Larger models available.
- Multiple compartments for new oil.
- Each compartment includes sight gauge(single wall model only) with guard, hose reel bracket, liquid seal fill point, RHS nozzle holster, vent with riser pipe, drain and pump port. Forklift pockets with bolt down tabs.
- Each new oil compartment includes 5:1 pneumatic pump, 15 Mtr x 1/2" heavy duty spring rewind hose reel with R1 hydraulic hose, mechanical metered oil nozzle with flexible extension and non-drip tip, 1/2" R1 feed hose between pump and reel.
- Waste Oil Option. Waste oil compartment includes 3/4" pneumatic operated double diaphragm pump with 4 way evacuation valve, 4 x 1" R1 hydraulic hoses to connect valve to pump and reel to allow reversing flow of pump, 10 Mtr x 1" spring rewind hose reel with suction/delivery hose, manual isolation valve with camlock. The four way evacuation valve allows for easy suction from machine to tank and removal from tank to collection tank at end of operation.

| Code | Description |
|-----------------|---|
| STT2C-1000 | Equipco service truck oil tank with 2 compartment for new oils. 1000 Ltr total capacity oil tank. Two compartments, 2 x 500 Ltr for new oil. |
| STT3C-900 | Equipco Service Truck Oil Tank with 3 Compartments for New Oils. 900 Ltr total capacity oil tank. Three compartments, 3 x 300 Ltr for new oil. |
| STT4C-1200 | Single Skin Oil Tank. Equipco Service Truck Oil Tank with 4 Compartments for New Oils. 1200 Ltr total capacity oil tank. Four compartments, 4 x 300 Ltr for new oil. |
| STT4CWS-1300 | Single Skin Oil Tank. Equipco Service Truck Oil Tank with 4 Compartments for New Oils and Waste Oil. 1300 Ltr total capacity oil tank. Four compartments, 3 x 300 Ltr for new oil and 1 x 400 Ltr for waste oil. |
| SBSTT4CWS-1300 | Equipco Service Truck Self Bunded Oil Tank with 4 Compartments for New Oils and Waste Oil. 1300 Ltr total capacity self bunded (double wall) oil tank. Four compartments, 3 x 300 Ltr for new oil and 1 x 400 Ltr for waste oil. |
| STT-GPR | Greasing System Upgrade for STT. 60:1 Ratio grease pump with 20Kg drum cover, follower plate, lead hose and booster gun with Z swivel. Made in Italy. Heavy duty spring rewind hose reel with 15 Mtr x 1/4" hose. Made in Italy. 20Kg Drum holder with bracket mounted on short side of STT tank. |
| STTCCERTLL-1300 | Four lift lugs for STT model service truck oil tank sizes from 900 Ltr to 1300 Ltr, certified for lifting when full. |
| STTC-NLL-1300 | Four lift lugs for STT model service truck oil tank sizes from 900 Ltr to 1300 Ltr, for lifting tank when empty only. |



Oil Tank Packages



Multiple Compartment Oil Tank Package For Mining Service Trucks



Oil Tank Package



Multi Compartment Oil Tank Package



Oil Tanks



Oil/Lube tank Package. Container system.



Bulk Grease System



Multi Compartment Oil Tank Package



Dual Oil Tank Mini Packages



Service Truck Tank



Mobile Oil Tank



Bulk Oil Lube Skid



Service Truck Tank



Oil Tanks