


ZVA ELAFLEX SERVICE STATION BOWSER NOZZLE

ZVA SLIMLINE

ZVA Slimline unleaded/diesel automatic shut off nozzle with inbuilt check valve.

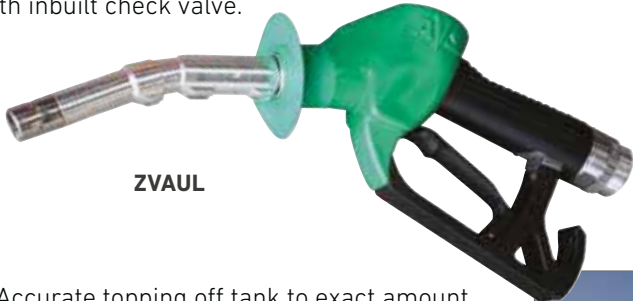

ZVAUL

Code	Description
ZVAUL	1" Unleaded genuine ZVA Slimline auto shut off nozzle. 50 LPM max flow.
ZVADI	1" Diesel genuine ZVA Slimline auto shut off nozzle. 80 LPM max flow.

- Accurate topping off tank to exact amount.
- Integral swivel joint for ease of use. 1" BSPF.
- Fully serviceable with all parts available.
- Working pressure 7.25 - 58 PSI max.
- Up to 50 LPM max flow unleaded ZVAUL.
- Up to 80 LPM max flow ZVADI.
- Made in Germany.
- Compound main valve and bleed poppet offers minimum pressure loss and maximum flow rate.
- NMI/NSC certified for resale use.
- Pump use only.

Options:

- Options on colours of scuff guard for low flow range.
- Splash guard available for low flow range.



ZVADI



ZVA25-5

1" Genuine ZVA25 high flow diesel automatic shut off nozzle with inbuilt check valve.

- Fully serviceable.
- Made in Germany.
- 140 LPM max flow rate.
- Diesel use only.
- NMI/NSC certified for resale use.
- Integral swivel joint.
- Pump use only.
- Working pressure 72 PSI max



ZVA32

1 1/4" ZVA32 high flow diesel automatic shut off nozzle with inbuilt check valve and swivel with self lubricated ball bearing.

- Fully serviceable.
- Made in Germany.
- 200 LPM max flow rate.
- Diesel use only.
- Pump use only.
- NMI/NSC certified for resale use.
- 32mm inlet.
- Working pressure 7.25 - 87 PSI max.

Code	Description
ZVA25-5	1" Genuine ZVA25 High flow diesel auto shut off nozzle. 140 LPM max.

Code	Description
ZVA32	(32mm) 1 1/4" Genuine ZVA32 high flow diesel auto shut off nozzle. 200 LPM max.