




HIGH FLOW SELF PRIMING DIESEL PUMPS

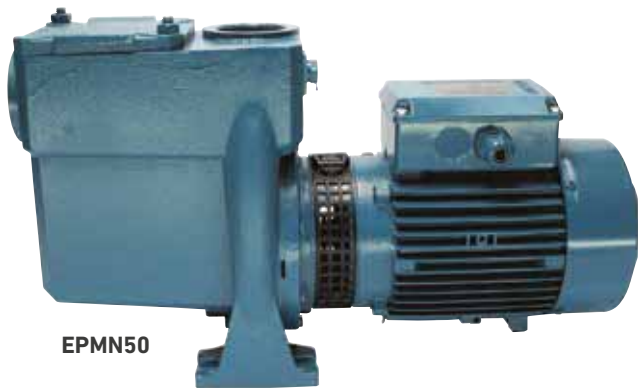

EPMN50

Code	Description
EPMN50L	50mm self priming centrifugal pump with 2 HP motor. 50mm suction/delivery ports. 350 LPM at 15 Mtr head. For diesel and clean water transfer. Continuous duty rated. With built-in basket strainer. Viton seal. 240 Volts.
EPMN50	50mm self priming centrifugal pump with 2 HP motor. 240 Volts. 50mm suction/delivery ports. 900 LPM at 5 Mtr head. For diesel and clean water transfer. Continuous duty rated. With built-in basket strainer. Viton seal.
EPMN80	80mm self priming centrifugal pump with 5.5 HP motor. 3 phase. 80mm suction/delivery ports. 1400 LPM at 9.5 Mtr head. For diesel and clean water transfer. Continuous duty rated. With built-in basket strainer. Viton seal.

TANKER UNLOADING DIESEL PUMPS

Code	Description
100-80TE-240T	Heavy duty cast iron centrifugal and suction pump coupled to Teco Monarch 240 Volt 2.2Kw 4 Pole electric motor with viton seals and mounting base. 100mm inlet/80mm outlet, table "E" Flanged. 900 LPM at 8 Mtr head.
100-80TE-415T	Heavy duty cast iron centrifugal and suction pump coupled to Teco Monarch or CMG 3 phase, 4 pole, 2.2Kw electric motor with viton seals and mounting base. 100mm inlet/80mm outlet, table "E" Flanged. 1200 LPM at 6.5 Mtr head.



100-80TE-415T

SUBMERSIBLE TURBINE PUMPS FOR COMMERCIAL USE

Franklin submersible turbine pumps are world leaders with their MagShell™ technology. Standard with active air elimination, which eliminates air through the highest point in the pump head at all times when the pump is running, assuring air does not pass into discharge piping. FE Petro STPs include a contractor electrical disconnect, which requires loosening only one bolt, allowing motor wiring to be disconnected without venting the dangerous tank vapours into the sump when servicing FE Petro submersible pumps.

Code	Description
STP150B-VL2-19	1.5 HP 240 Volt Franklin fixed speed submersible turbine pump. 300 LPM max flow rate.
STP200B-VL2-19	2 HP 240 Volt Franklin fixed speed submersible turbine pump. 325 LPM max flow rate.
STPISTMVS4-VL2-19	4 HP 3 Phase Franklin variable speed submersible turbine pump. 430 LPM max flow rate.
STP-SCI	Smart Pump Controller for 240 Volt Franklin fixed speed STP.
ECO-VFC	ECO-VFC Variable speed pump controller.

