

SAFETY QUICK DRY BREAK COUPLING

APPLICATION

- The dry break quick coupling is used to prevent any possible leaking during the process mainly transferring hazardous fluids that are suitable for the use in different fields, like petrochemical and chemical.

CHARACTERISTICS


Housing	Aluminium or Stainless steel 316
Working pressure	10-25 Bar
Seal	O-ring Viton
Thread	BSP



ADB50-DBC-B



50AL-DBC

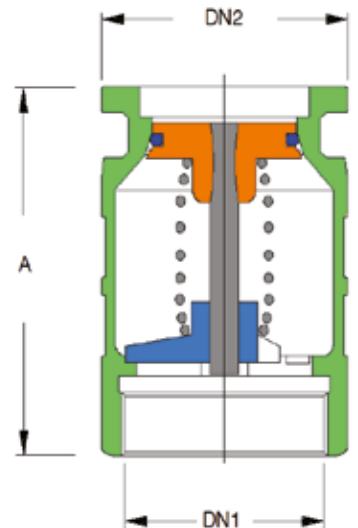

DESCRIPTION

- The valve opens and closes automatically while connected or disconnected without residual loss of liquid.
- It can be connected or disconnected under pressure.

PART NUMBER	DN 1	DN 2	A	Material	Use
50AL-DBC	2" BSP Female	70 mm	92 mm	Aluminium	Diesel Fuel Flammable
ADB50-DBC-B	2" BSP Female	70 mm	92 mm	Stainless steel 316	Adblue

