


FUEL FILTER 400-30PD

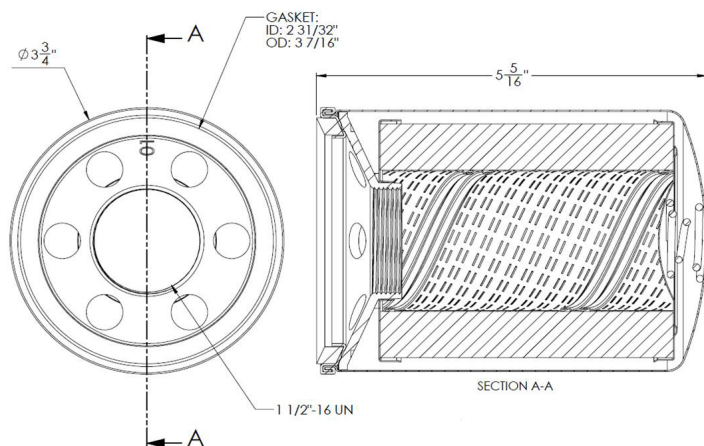

MADE IN USA

DESIGNED FOR FUEL DISPENSERS & COMMERCIAL FUELING PUMPS

Specifications

Maximum Working Pressure:	50 psi
Flow Range:	94 lpm
Maximum Diff. Pressure:	25 psid
Media	30 μ Cellulose


400-30PD

- 400 series 30 micron Cimtek particulate element for use in all dispenser applications for particle removal .
- Element 70016
- 50 PSI max.
- 94 LPM max flow.
- Petrol, diesel, biodiesel, ULSDParticulate

Reference Performance Values

$B_{23.4} = 2$	$B_4 = 1.14$
$B_{>30} = 10$	$B_6 = 1.12$
$B_{>30} = 75$	$B_{14} = 1.24$
$B_{>30} = 100$	
$B_{>30} = 200$	

Flow Versus Pressure (ISO 3968)

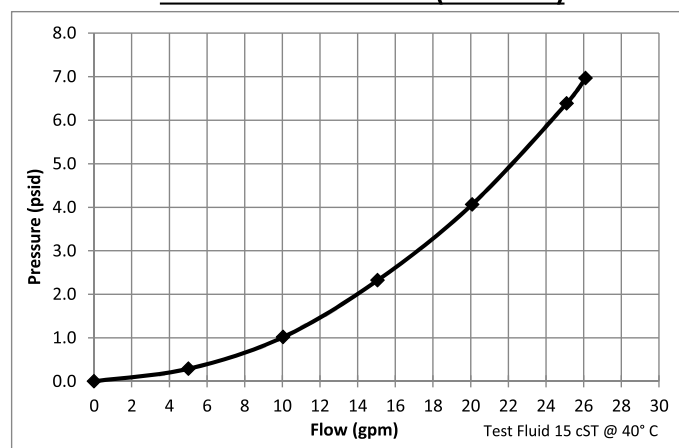

Average Filtration Efficiency (ISO 16889)

