

HIGH FLOW FUEL FILTERS

150 LPM, 1" BSP CIMTEK FILTER ASSEMBLY WITH 2-MICRON WATER-ABSORBING ELEMENT



DIESEL, PETROL, ULSD & BIODIESEL



ULTIMATE DEFENSE

increased retention, lower clean filter differential pressure, and less resistance to fluid flow

25MM 2-MICRON FILTER ASSEMBLY HYDROGLASS MEDIA FOR RUST, DIRT AND OTHER SEDIMENT

The EFHD series provides the industry with a filter for many applications, with its ease of installation and element replacement, it is one of our highly trusted and most sold lines. The EFHD-152W-25 carries a 2-micron water-absorbing replacement filter element, as it provides a simple solution to most high-flow farming and industrial filtering needs.

ITEM CODE	DESCRIPTION	MAX FLOW	WORKING PRESSURE	MEDIA	THREAD SIZE
EFHD-1502W-25	1" BSP Cimtek 150LPM filter with 2 micron water absorbing element	150 LPM	50 PSI	Hydroglass	1" FBSP




COMPATIBILITY

Petrol & ethanol (25%), methanol (15%) diesel, ULSD

HYDROGLASS MEDIA

Advanced water detection material between two Microglass layers restricts flow when water is detected



DETECTION



Removes particulate with water-absorbing element



FILTER HEAD

Mounting bolt holes on 25mm head.
Code: EFHD-H15025


Material	Aluminium
Filter Thread	UNF 1.5"-16
Mounting Holes Size	M8
Dimension	135x135x82mm
Weight	0.55kg

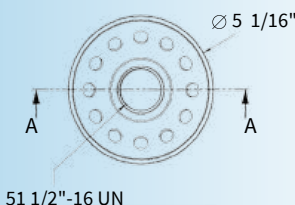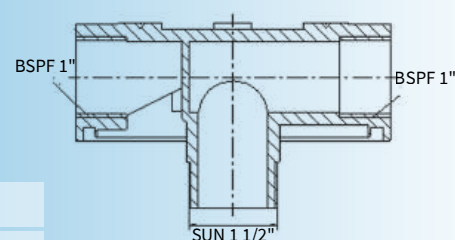

FILTER ELEMENT

Easy spin/off canister design allows for easy replacement of old/ damaged canisters.

Large body canisters for longer overall element life and higher flow allowance.

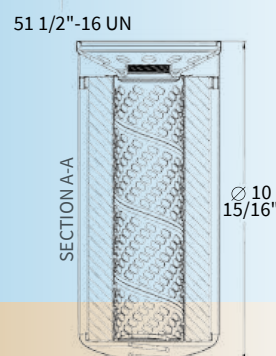

AVAILABLE REPLACEMENT OPTION:

EFHD-1502W	Replacement filter element Hydroglass media particulate and water detection. 150 LPM
------------	--

SUITABLE FOR INSTALLATION ON PRESSURE LINE ONLY.