


HUSKY SWIVELS



MADE IN USA

High flow rates due to laminar flow design

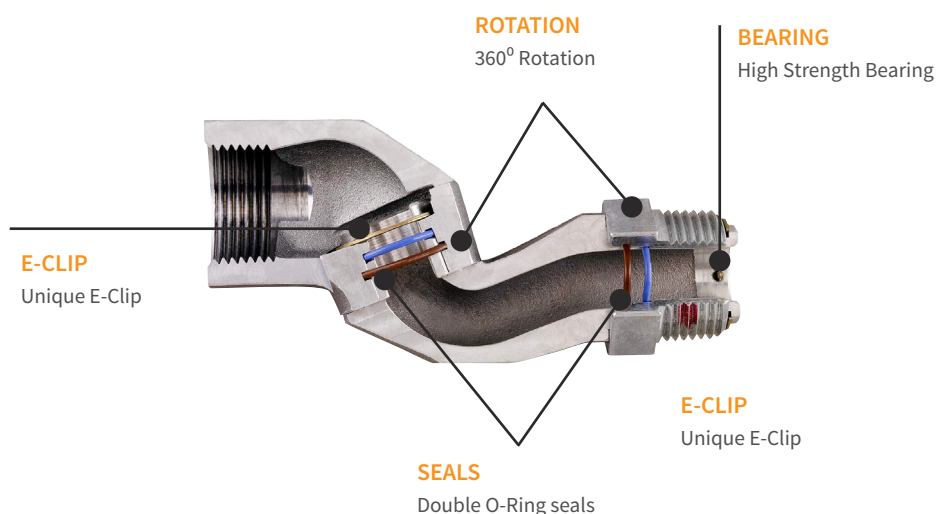

Compatible with unleaded, diesel, and Ethanol blends through E10

	HMP20	HMP25
INLET-OUTLET	¾" BSP	1" BSP
BODY	Aluminum, Zinc and Zinc Plated Steel	
INNER O-RING	Fluorosilicone	
OUTER O-RING	Fluorocarbon	

Diesel ULSD Ethanol **MADE IN USA**  

- Compatible with unleaded, diesel, and Ethanol blends through E10.
- Double o-ring seals at each swivel provide long life at low temperatures (-40°F/C).
- High strength step shoulder bearing diameters and impact absorbing stops.
- For use with high flow nozzles with flow rates up to 100 gpm/ 378 Lpm.
- Raised stainless steel ball bearings provide easy joint movement, greatly improving ease of swivel when used on higher pressure systems.
- 75% less back pressure.

Code: HMP25

Code	Size	Description	Usage
HMP20	¾"	Husky multi-plane swivel. ¾" BSP Inlet/outlet. UL listed. Viton seal.	 E blends up to 10%
HMP25	1"	Husky multi-plane swivel. 1" BSP inlet/outlet. UL listed. Viton seal.	 E blends up to 10%



HMP20



HMP25