


THREAD SEALANTS

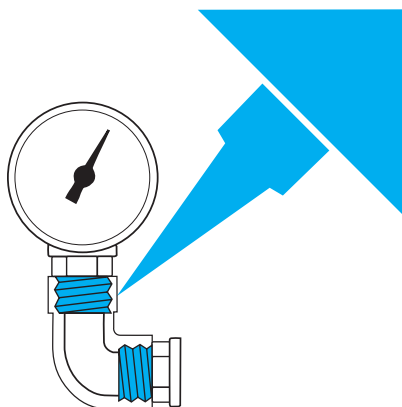

- Replace hemp and PTFE tapes.
- Range of products with different curing time.
- Lubricate for easier assembly.
- Available in 2 grades of locking strength: medium (possible to dismantle), high (permanent locking).
- Maintain the initial applied torque.
- Seal to the burst pressure and to thermal expansion rates.
- Seal and lock threaded connections against pressure of gas, air, water, oils, hydrocarbons and many chemicals.
- Some certified according to various international standards, e.g. DVGW, NSF, WRAS, TZW, BAM, GLOBAL MARK.

MADE IN EUROPE

UNI EN ISO 9001 CERTIFICATION UNI EN ISO 14001 CERTIFICATION

Highly resistant to heat, corrosion, vibrations, water, gases, oils, hydrocarbons, and many chemicals.

THREAD SEALANT FOR STAINLESS STEEL AND METAL THREADS - 250ML

SUITABLE FOR OILS, DIESEL, PETROL & ADBLUE



Loxeal 85-86 250ml tube high strength thread sealant for stainless steel and metal threads. Maintains sealing properties up to 200°C. High resistance to thermal shock, vibration and suitable for use with water, gas, oils, diesel, petrol, refrigerant fluids and AdBlue.

8586250

FAST CURING HIGH STRENGTH ANAEROBIC THREAD SEALANT - 250ML

SUITABLE FOR OILS, DIESEL & PETROL



Loxeal 85-05 250ml Tube. Fast curing high strength anaerobic thread sealant. Suitable for oils, water, gases, diesel and petrol.

8505250

HIGH PRESSURE 10 BAR THREAD SEALANT

SUITABLE FOR OILS, DIESEL & PETROL
INDUSTRY FAVORITE

Loxeal 58-11 250ml tube high pressure 10 Bar thread sealant – AGA approved. Suitable for diesel, petrol, oils water and gas. Highly viscous to help prevent running on threads.



581150 (50ml)

5811250 (250ml)



Specifications

8586250	Thread sealant for stainless steel and metal threads - 250ml. Suitable for oils, diesel, petrol & AdBlue
8505250	Fast curing high strength anaerobic thread sealant - 250ml. Suitable for oils, diesel & petrol
581150	High pressure 10 Bar thread sealant - 50ml. Suitable for oils, diesel & petrol
5811250	High pressure 10 Bar thread sealant - 250ml. Suitable for oils, diesel & petrol