

VEHICLE FLEETS

CONSTRUCTION

AGRICULTURE



What can  
25 GPM  
do for  
you?



- ▶ **Quick-Fit Modular**  
Easily attach a filter, meter, or both
- ▶ **High Pressure Performance**  
Ideal for use with a hose reel
- ▶ **Engineered to Deliver**  
Featuring innovative product advancements and backed by an industry-leading 4-year warranty

# NEXT GENERATION MODULAR VANE PUMP V25

Equipped with 

- 30-Minute, Auto Power Down with Easy Reset
- Pump 750 Gallons Uninterrupted
- Prevents Misuse

# GPRO®



Eliminate dangerous leaks with flanged connections, O-rings, and meter mag drive

Add the Quick-Fit Modular Filter Kit

- Easy Installation
- The only tool needed is a hex key (included)
- **THREE options** to install the filter adapter

# QUICK-FIT MODULAR



Four bolts and an O-ring - quickly attach a filter, meter, or both to customize your personal fuel station!

**Quick-Fit Accessories Sold Separately**  
- Quick-Fit Filter Adapter Kit includes modular adapter and filter  
- M30 Modular Fuel Meter is available in Gallons or Litres and 3/4 or 1 inch thread size




# LOADED WITH FEATURES



## Multi-Directional 90° Outlet

- Just four bolts and an O-ring for fast, leak-free installation of Quick-Fit Modular accessories

- Optional outlet fittings available to adapt to your application for a custom configuration

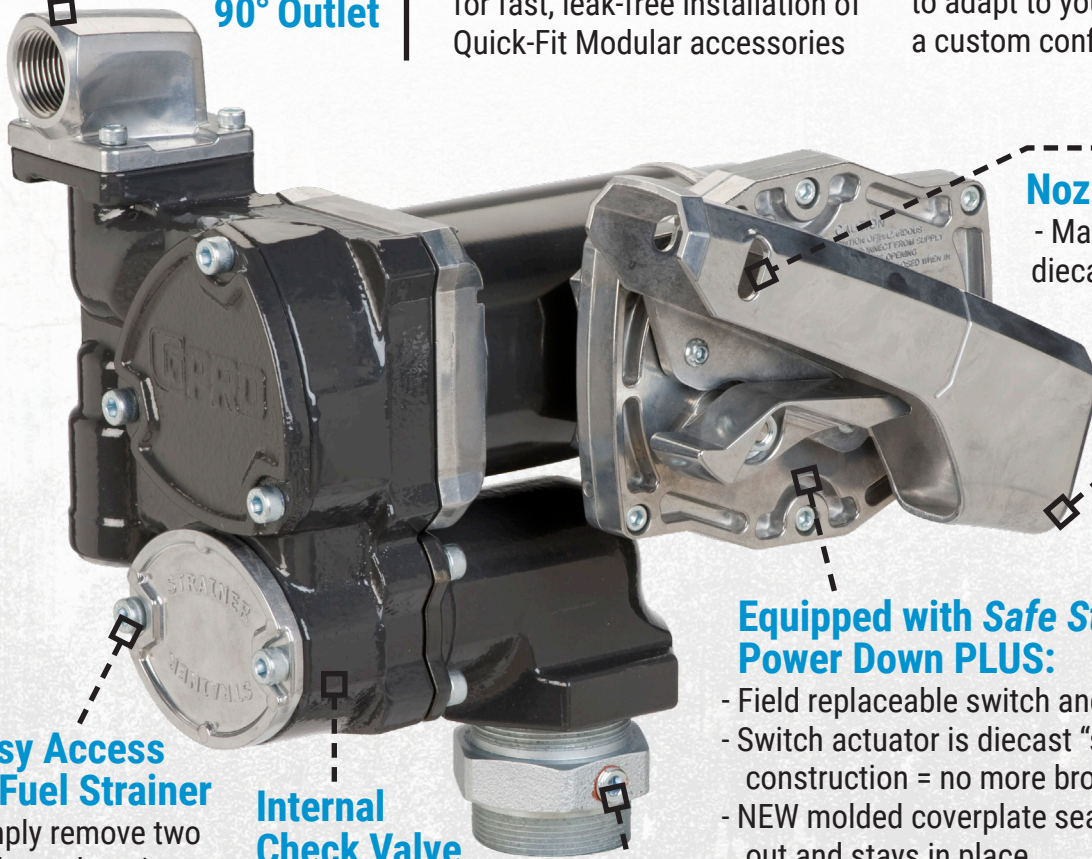

## Lockable Nozzle Holder

- Made of durable diecast aluminum

## NEW Drip Catch

- Helps keep tanks and trucks clean

## Equipped with Safe Stop Power Down PLUS:

- Field replaceable switch and circuit breaker
- Switch actuator is diecast "solid" aluminum construction = no more broken switches
- NEW molded coverplate seal keeps moisture out and stays in place

## Easy Access to Fuel Strainer

- Simply remove two bolts and strainer access cover

## Internal Check Valve with "Perfect Prime"

- Keeps pump head primed and ready
- Reduces wear by avoiding dry prime conditions

## Tank Adapter Included

- Easy Installation
- Ready for anti-siphon
- Vent kit sold separately

**Automatic and Manual Nozzle Models** - Feature a factory-installed power cord and include a telescoping suction pipe that adjusts from 15 in. to 40 in. (38.1 cm to 101.6 cm)





# V25 MODELS / SPECIFICATIONS



**BUILT  
to LAST**

Made with materials selected to prevent rust and survive all weather conditions:

- ▶ Diecast Aluminum
- ▶ Powder-Coated Cast Iron
- ▶ Powder-Coated Steel
- ▶ Molded Coverplate Seal

Superior components for long-lasting, trouble-free performance:

- ▶ Cast Iron Pump Head and Carbon Vanes
- ▶ All Metal Pump Drive Components

Built-in protection:

- ▶ Safe Stop - 30-Minute, Auto Power Down Prevents Misuse
- ▶ Internal Check Valve - Conserve Prime and Reduce Wear
- ▶ Circuit Breaker Motor Protection



**QUIET  
OPERATION**

Quieter than the leading competitor's pump.

## All Models

PERFORMANCE	
Flow Rate:	25 GPM (94 L/min)
OPERATING PRESSURE	
20 PSI (1.37 bar) - High Pressure	
OPERATING TEMPERATURE	
-20°F to 125°F (-29°C to 52°C)	
MOTOR	
2000 RPM, 4/10 HP, UL Listed to US and Canadian Standards	
MECHANICAL CONNECTIONS	
Inlet / Outlet:	1 in. NPT
Mounting:	2 in. NPT
COMPATIBLE FLUIDS	
<i>Designed, tested and approved for use with gasoline blends (up to E15), diesel fuel blends (up to B20) and kerosene.</i>	

## Pump Only Models

ADDITIONAL COMPATIBLE FLUIDS
<i>In addition to the statement above, pump only versions support the use of aviation gasoline (AVGAS100LL) and kerosene grade (JET A).</i>



## Complete Pump Models

DISPENSING HOSE
18 ft. (5.5m) x 1 in.
SUCTION PIPE
1 in. NPT, Telescoping to 40 in. (101.6 cm)
FACTORY-INSTALLED POWER CORD
18 ft. (5.5m), 10/2 AWG*



## 12-Volt Models

ELECTRICAL	
Input:	12V (dc) w/40 amp circuit breaker switch
Current Draw:	35 amp
Fuse:	40 amp

Part No.	Model	Nozzle
170000-03	V25-012AD	Automatic
170000-02	V25-012MD	Manual
170000-01	V25-012PX	None

## Extreme Temperature Model

*- Capable of operation in temperatures as low as -40°F (-40°C)*

Part No.	Model	Nozzle
170000-05	V25-012PX+XT	None
170000-06	V25-012AD+XT	Automatic

## 24-Volt Models

ELECTRICAL	
Input:	24V (dc) w/20 amp circuit breaker switch
Current Draw:	18 amp
Fuse:	20 amp

Part No.	Model	Nozzle
170001-03	V25-024AD	Automatic
170001-02	V25-024MD	Manual
170001-01	V25-024PX	None

*- Patent Pending*

