

SWIVELS

HUSKY 1" BREAKAWAY SWIVEL



**COMPATIBLE WITH ETHANOL BLENDS
THOUGH E10**



25mm Husky Breakaway Swivel with Specialised Thread to Suit ZVA25 Nozzle

Husky breakaway swivel. 1" BSP Inlet/outlet with specialised thread to suit ZVA25 nozzle

ITEM CODE	DESCRIPTION	INLET/OUTLET	BODY	SEALS	SPRINGS
ZV25TB	Husky breakaway swivel. 1" BSP Inlet/outlet with specialised thread to suit ZVA25 nozzle	25mm (1") BSP	Aluminum, Zinc Alloy	Fluorosilicone, Fluorocarbon	Stainless Steel

REDUCED NUISANCE BREAKS

Wave spring helps reduce nuisance breaks due to water hammer.

EXTENDED PERFORMANCE


Dynamic seals have double o-ring construction for long life and low temperature performance.

RELIABLE RECONNECTION

Safe-T-Break is reconnectable and retains UL listing after reconnecting

WHIP HOSE-FREE

Eliminates the need for a whip hose.

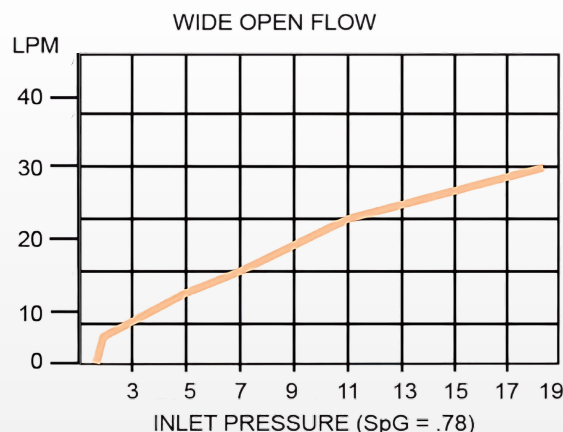

SEAMLESS ROTATION

Multi-plane, full 360° spherical rotation for easy movement of nozzle.

REDUCED BACKLASH

Separates at less than 325 lbf / 1,445.6 N which minimizes the backlash force of separations, reducing damage to equipment

SECURE CONNECTION

Swivel Sync feature to prevent separation failure in the 90° position

BIDIRECTIONAL PROTECTION

Dual check valves stops fuel in both directions

