

AUTOMATIC FUEL DISPENSING NOZZLES

**1" BSPF GENUINE ZVA
SLIMLINE DIESEL
AUTOMATIC SHUT-OFF
NOZZLE**



DIESEL / PUMP USE ONLY

**NMI / NSC
CERTIFIED**

**FOR
RETAIL
USE**


MADE IN GERMANY

80LPM Genuine ZVA Slimline Auto Shut-Off Nozzle

The ZVA Slimline nozzle comes with 1" BSP integral female swivel joint for ease use, made in Germany.

ITEM CODE	DESCRIPTION	MAX FLOW	MAX PRESSURE	COMPATIBILITY	THREAD SIZE/TYPE	WEIGHT
ZVADI	Diesel genuine ZVA Slimline auto shut off nozzle. 80 LPM max flow	80 LPM	7-58 PSI	For diesel use only	1" BSP Female	1 kg

FLOW CHART

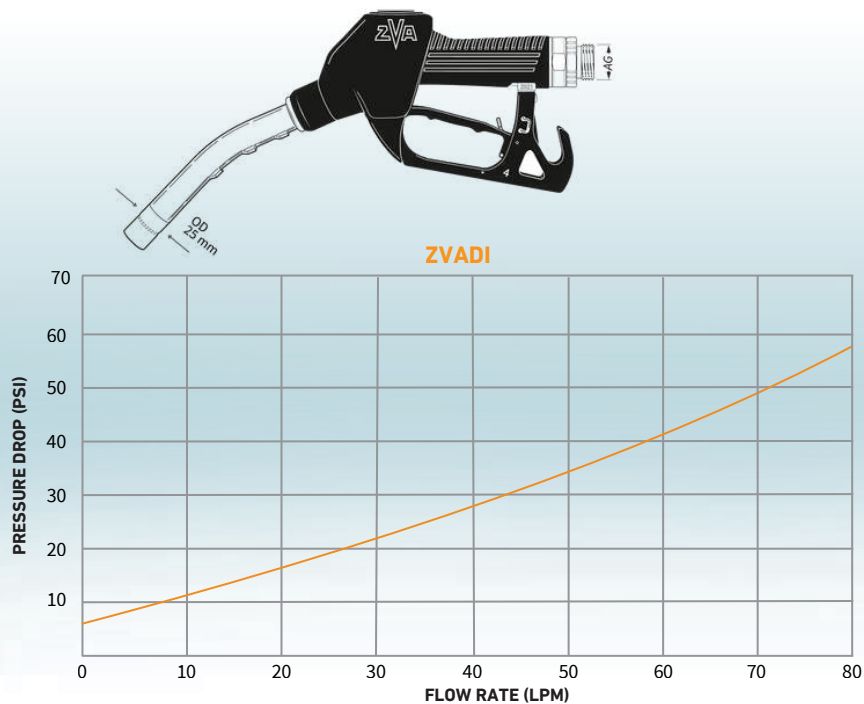


FEATURES


- PRECISION REFUELING**
Accurate topping off tank to exact amount.
- SWIVEL CONVENIENCE**
Integral swivel joint for ease of use.
- COMPLETE MAINTAINABILITY**
Fully serviceable with all parts available.
- OPTIMIZED FLOW**
Compound main valve and bleed poppet offers minimum pressure loss and maximum flow rate.



TECHNICAL PARTS

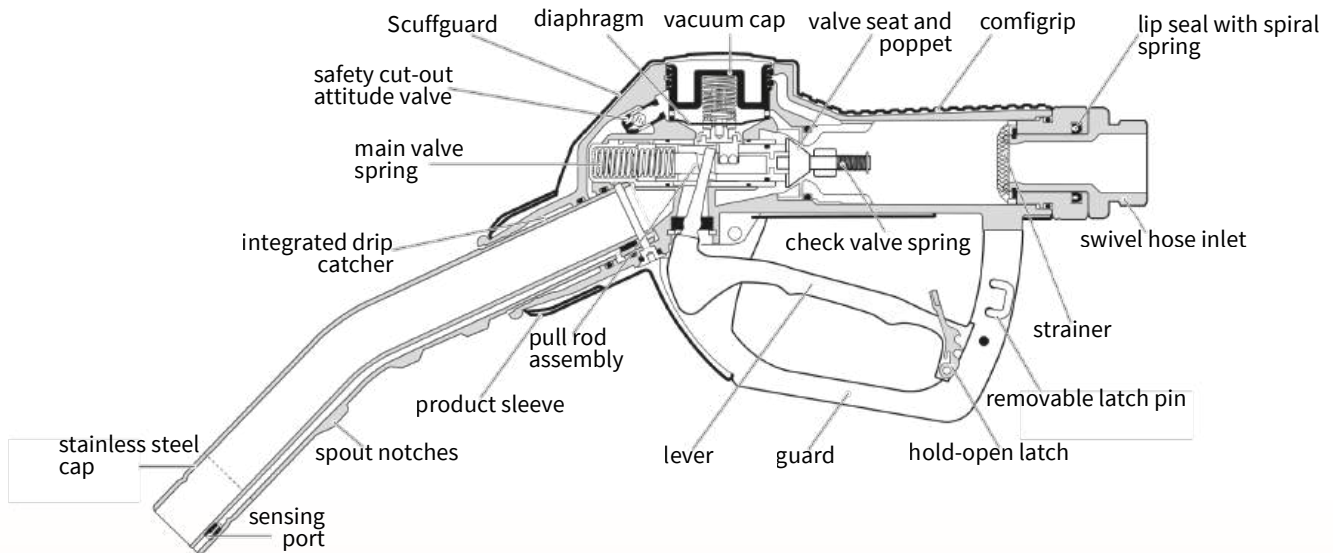

- Venturi type automatic shut-off with safety cut-out attitude valve.
- Built-in check valve.
- 2-speed lever latch with removable latch pin.
- Body and hose inlet of aluminium.
- Spout of aluminium, tip of stainless steel.
- Easy rotating swivel, swivel nut of stainless steel.
- Lip seal, O-rings + diaphragm of polyurethane and NBR. Guard and lever of composite plastic.
- Inner parts of brass, stainless steel, POM and PEEK.
- Scuffguard and comfigrip of PVC. Product Sleeve of polyurethane.

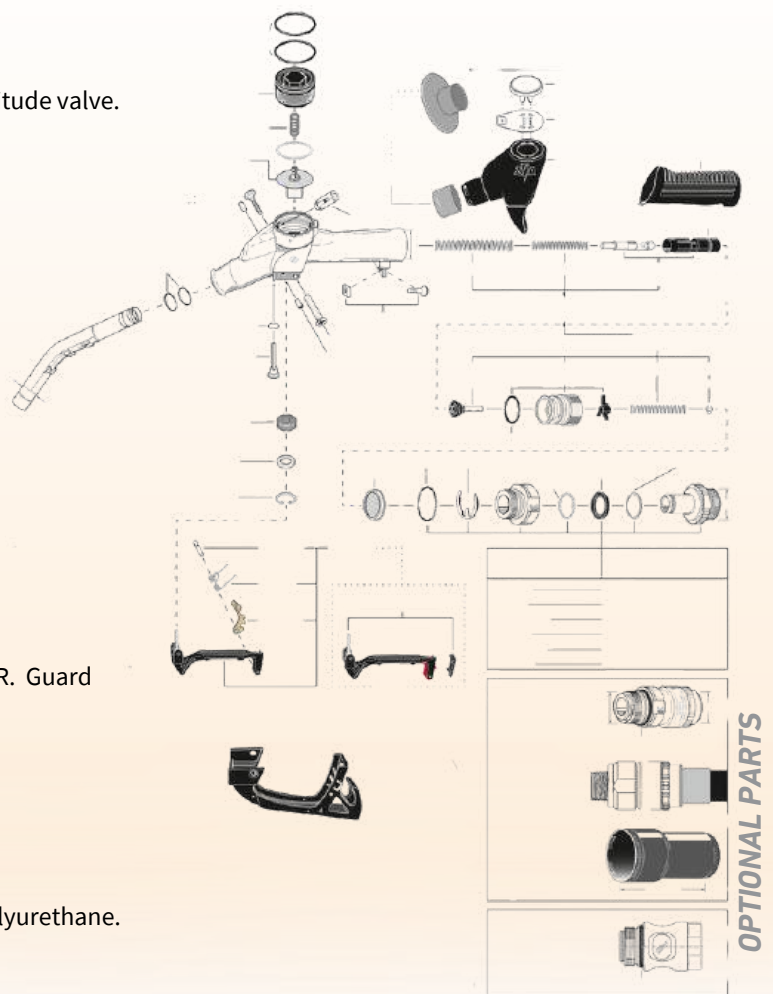

OPTIONS AVAILABLE

ZVA25-5	1" Genuine ZVA25 High flow diesel auto shut off nozzle. 140 LPM max.
ZVA32	1 1/4" ZVA32 high flow diesel automatic shut off nozzle with inbuilt check valve and swivel with self lubricated ball bearing.
ZVAUL	1" Unleaded genuine ZVA Slimline auto shut off nozzle. 50 LPM max flow.

OPTIONAL SCUFFS AND SPLASH GUARDS

