

HIGH FLOW FUEL FILTERS

151 LPM, 1" BSP CIMTEK HIGH FLOW Fuel Filter Assembly



DIESEL, PETROL, ULSD & BIODIESEL

25MM 10-MICRON FILTER ASSEMBLY CELLULOSE MEDIA FOR RUST, DIRT AND OTHER SEDIMENT

The EFHD series provides the industry with a filter for many applications, with its ease of installation and element replacement, it is one of our highly trusted and most sold lines. The EFHD-15010-25 is the most popular of the series, as it provides a simple solution to most high-flow Agriculture, Construction and Earthmoving bulk fuel dispensing filtration applications.

ITEM CODE	DESCRIPTION	MAX FLOW	WORKING PRESSURE	MEDIA	THREAD SIZE	ADAPTOR
EFHD-15010-25	1" BSP 10-micron filter assembly cellulose media for rust, dirt and other sediment. 151 LPM	151 LPM	50 PSI	10µ Cellulose	1" BSP	P200S-1



COMPATIBILITY

Petrol & ethanol (25%), methanol (15%) diesel, ULSD

CELLULOSE MEDIA

Resin bound plant-base fiber material

DETECTION

Removes particulate like rust, dirt and other sediment

AVAILABLE REPLACEMENT OPTION:



EFHD-15010 Replacement filter element cellulose media for rust, dirt and other sediment. 151 LPM



FILTER HEAD

Mounting bolt holes on 25mm head.
Code: EFHD-H15025

Material	Aluminium
Filter Thread	UNF 1.5"-16
Mounting Holes Size	M8
Dimension	135×135×82mm
Weight	0.55kg

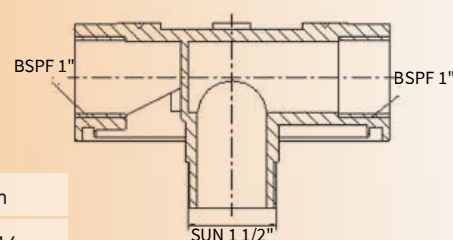

51 1/2"-16 UN

FILTER ELEMENT

Easy spin/off canister design allows for easy replacement of old/ damaged canisters.

Large body canisters for longer overall element life and higher flow allowance.

